
DEPARTMENT OF THE ARMY TECHNICAL BULLETIN

**CALIBRATION PROCEDURE
FOR
RADAR DATA RECEIVING
SET TEST SET AN/GKM-2A
(NSN 6625-00-926-4393)**


Headquarters, Department of the Army, Washington, D.C.
28 July 1975

	Paragraph	Page
SECTION I. INTRODUCTION AND DESCRIPTION		
Purpose and scope	1-1	2
Reporting of technical bulletin improvements	1-2	2
Descriptive data	1-3	2
General instructions	1-4	3
Difference among models	1-5	3
II. EQUIPMENT REQUIREMENTS		
Equipment required	2-1	4
Accessories required	2-2	4
III. PRELIMINARY OPERATIONS		
Preparations	3-1	4
Preliminary control settings	3-2	4
SECTION IV. CALIBRATION PROCESS		
Slow and fast sync tests	4-1	5
Ground speed and drift angle tone burst tests	4-2	5
Ground speed and drift angle frequency tests	4-3	7
Aircraft identification tone burst tests	4-4	8
Data annotation tone burst test	4-5	8
Bias adjust test	4-6	8
Gain adjust test	4-7	8
Bars, 111S, 222N, 555W, and 888N test	4-8	8
Rf output level test	4-9	9
Rf frequency test	4-10	9
Final procedure	4-11	9

SECTION I INTRODUCTION AND DESCRIPTION

1-1. Purpose and Scope. This bulletin provides information for the periodic calibration of Radar Data Receiving Set Test Set AN/GKM-2A (fig. 1). It is to be used by personnel trained and qualified in the use of calibration equipment. Since calibration personnel are

trained and qualified in the usage of test and measuring equipment, detailed instructions concerning the operation and use of these equipments are not contained in this bulletin.

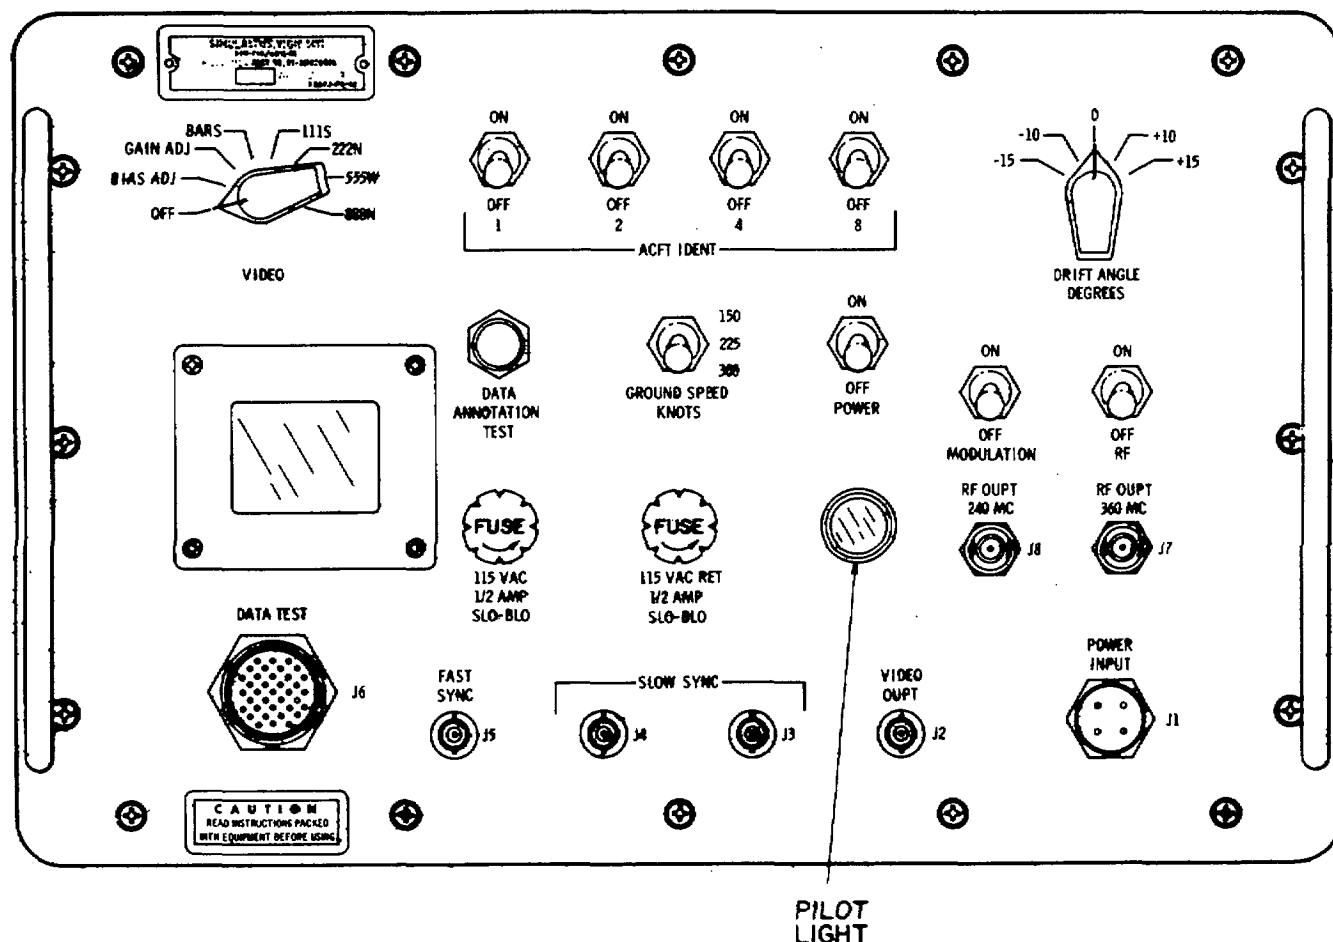

EL6625-827-50/1-TB-1

Figure 1. Radar Data Receiving Set Test Set, AN/GKM-2A, front panel view.

1-2. Reporting of Technical Bulletin Improvements. The reporting of errors, omissions, and recommendations for improving this bulletin is authorized and encouraged. Submit reports on DA Form 2028 (Recommended Changes to Publications and Blank Forms) directly to Commander, US Army Electronics Command, ATTN: AMSEL-MA-CQA, Fort Monmouth, NJ 07703.

1-3. Descriptive Data. Radar Data Receiving Set Test Set AN/GKM-2A is an rf and data signal generator used to test Radar Data Receiving Sets AN/TKQ-1 and AN/TKQ-2 (data receiving set). It is also used to monitor the output of the AN/TKQ-2 data annotation converter (Converter-Storer, Signal Data CV-2093/TKQ-2). Additional data is listed in a, b, and c as follows: