LUBRICATION ORDER

LO5-4310-350-12

15 JULY 1975

COMPRESSOR, AIR, TANK MOUNTED, ELECTRIC MOTOR DRIVEN, 15 CFM AT 175 PSI CHAMPION MODEL NO. HR5-8M-3 NSN 4310-00-537-8876

Reference: Federal Supply Catalog C9100-IL

Intervals are based on normal hours of operation. Adjust to compensate for abnormal operation and severe conditions. During inactive periods, sufficient lubrication must be performed for adequate preservation.

Clean parts with SOLVENT, dry-cleaning, Type II (SD-2). Dry before lubricating.

Drain crankcases while the lubricant is still warm from previous use. Replenish and check level when cool.

* The time specified is the time required to perform all services at the particular interval.

* TOTAL MAN-HR.		* TOTAL MAN-HR	
INTERVAL	MAN-HR	INTERVAL	MAN-HR
10	0.1	500	0.25
50	0.25		

FOLD FOLD

LUBRICANT ● INTERVAL

Air Intake Muffler. Disassemble, Clean and Reassemble. — 50

Oil Filler Cap (See Key) — OE/HDO

Oil Level Sight Gage (Check Level) — 10
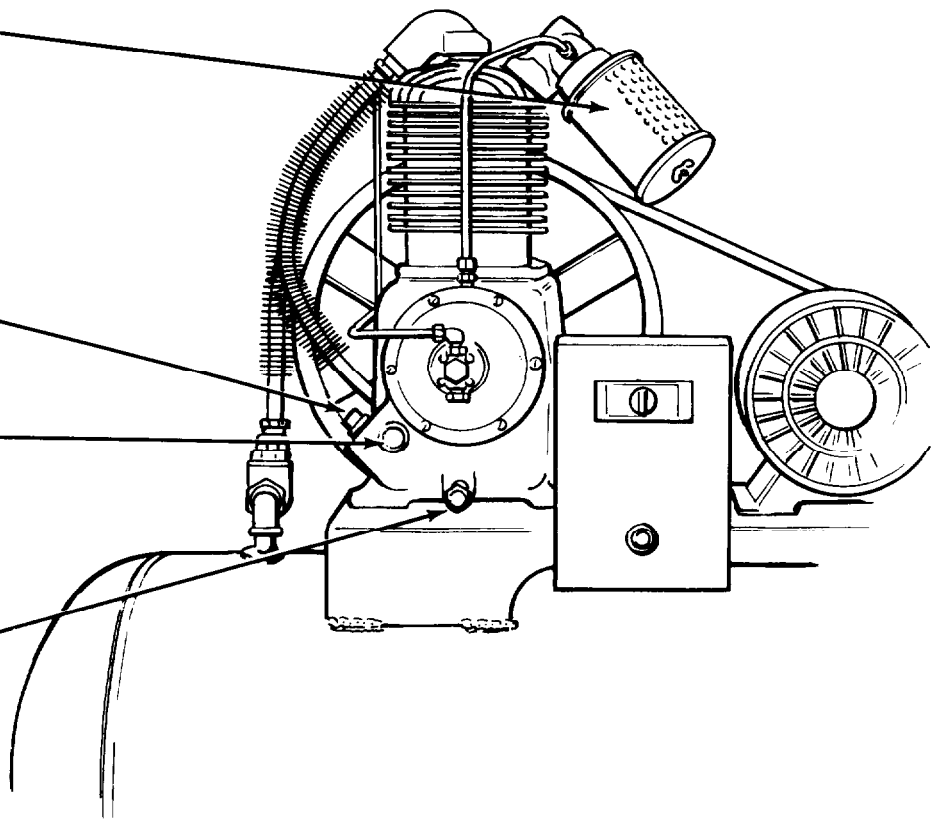
Oil Drain Cap (Drain and Refill) (See Note 1) — 500