

COMPRESSOR, AIR ROTARY,
DIESEL ENGINE DRIVEN, SKID MOUNTED
125 cfm at 100 psig
(4310-01-348-6951)
MODEL 16MS125

References: TM 9-4310-397-14 and TM 9-4310-397-24P

REPORTING ERRORS AND RECOMMENDING IMPROVEMENTS

You can help improve this manual. If you find any mistakes, or if you know of a way to improve these procedures, please let us know. Mail your letter or DA Form 2028 (Recommended Changes to Publications and Blank Forms) directly to: Commander, US Army Aviation and Troop Command, ATTN: AMSAT-I-MP, 4300 Goodfellow Blvd., St. Louis, MO 63120-1798. You may also submit your recommended changes by E-mail directly to <mpmt%avma28@st-louis-emh7.army.mil>. A reply will be furnished directly to you.

DISTRIBUTION A: Approved for public release; distribution is unlimited

NOTES

The lowest level maintenance is Unit and is indicated by the symbol (O). Intervals and the related man hour times are based on normal operation. The man-hour time specified is the time required to perform all the services prescribe for a particular interval. The interval shall be changed to compensate for abnormal operation and severe operating conditions or contaminated lubricants. The interval may be extended during periods of low level activity, commensurate with adequate preservation precautions.

Oil filters shall be serviced/cleaned/changed as applicable, when:


- a. They are known to be contaminated, or clogged;
- b. Service is recommended by AOAP laboratory analysis, or
- c. At prescribed hardtime intervals.

This compressor is not enrolled in the Army Oil Analysis Program. HARDTIME INTERVALS APPLY.

For equipment under manufacturer's warranty, hardtime oil service intervals shall be followed. Intervals shall be shortened if lubricants are known to be contaminated or if operation is under adverse conditions such as longer than usual operating hours, extended idling periods, extreme heat, or dust.

LUBRICANT

ENGINE CRANKCASE OIL AND FILTER (O) (See note 1)	SEE TABLE	INTERVAL 100 H INITIAL BREAK-IN 250 H THEREAFTER
CONTROL LINKAGE (O)	OE/HDO-30	100H
COMPRESSOR OIL AND FILTER (O) (See note 2)	SEE TABLE	100 H INITIAL BREAK-IN 500 H THEREAFTER
NOSE REEL (O)	GAA	100 H
SERVICE VALVES (O)	GAA	1000 H

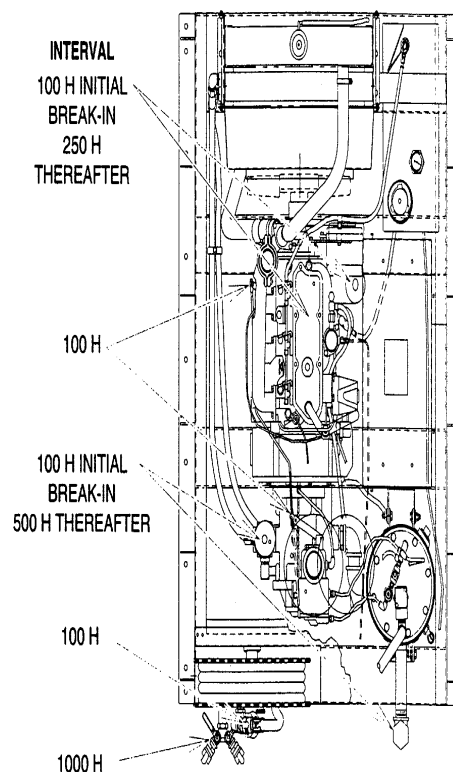

LUBRICATION POINT	CAPACITY/ AMOUNT	LUBRICANT MIL. SYMBOL (NATO CODE) SPECIFICATION	EXPECTED TEMPERATURES	MAN- HOUR
ENGINE CRANKCASE (O)	9 QUARTS (8.52 L)	OE/HDO-30 (O-238) MIL-L-2104	+40 TO +125°F +10 TO +52°C	.5
		OEA (D-183) MIL-L-46167	-55 TO +40°F -67 TO +10°C	
COMPRESSOR (O)	20 QUARTS (18.9 L)	OE/HDO-30 (O-238) MIL-L-2104	+40 TO +125°F +10 TO +52°C	.5
		OEA (D-183) MIL-L-46167	-55 TO +40°F -67 TO +10°C	
CONTROL LINKAGE (O)	OIL CAN (SPARINGLY)	OE/HDO-30 (O-238) MIL-L-2104	ALL	1
SERVICE VALVES (O)				
HOSE REEL (O)	GREASE AT FITTING	GAA (G-403) MIL-G-10924		1