LUBRICATION

ORDER

7 June 1965 (Supersedes LO 10-3930-232-20 7 Feb 1964)

TRUCK, LIFT, FORK, GASOLINE, PNEUMATIC TIRED WHEELS, 6,000 LBS

CAPACITY (ALLIS-CHALMERS MODEL FP60-24PS, ARMY MODEL MHE

183) W/ ALLIS-CHALMERS ENGINE MODEL 6MB-230

Reference TM 10-3930-232-20 C 9100 IL

Intervals are based on normal operation. Reduce to compensate for abnormal operations and severe conditions. During inactive periods sufficient lubrication must be performed for adequate preservation.

Clean fittings before lubricating.

Relubricate after washing or fording.

Clean parts with SD (Solvent, drycleaning), and dry them before lubricating them.

Broken arrow shafts indicate lubrication points on both sides of the truck.

Drain crankcase and gearcases only when hot as a result of operation. Clean magnetic drain plugs before installing them.

LUBRICANT · INTERVAL | **INTERVAL · LUBRICANT**
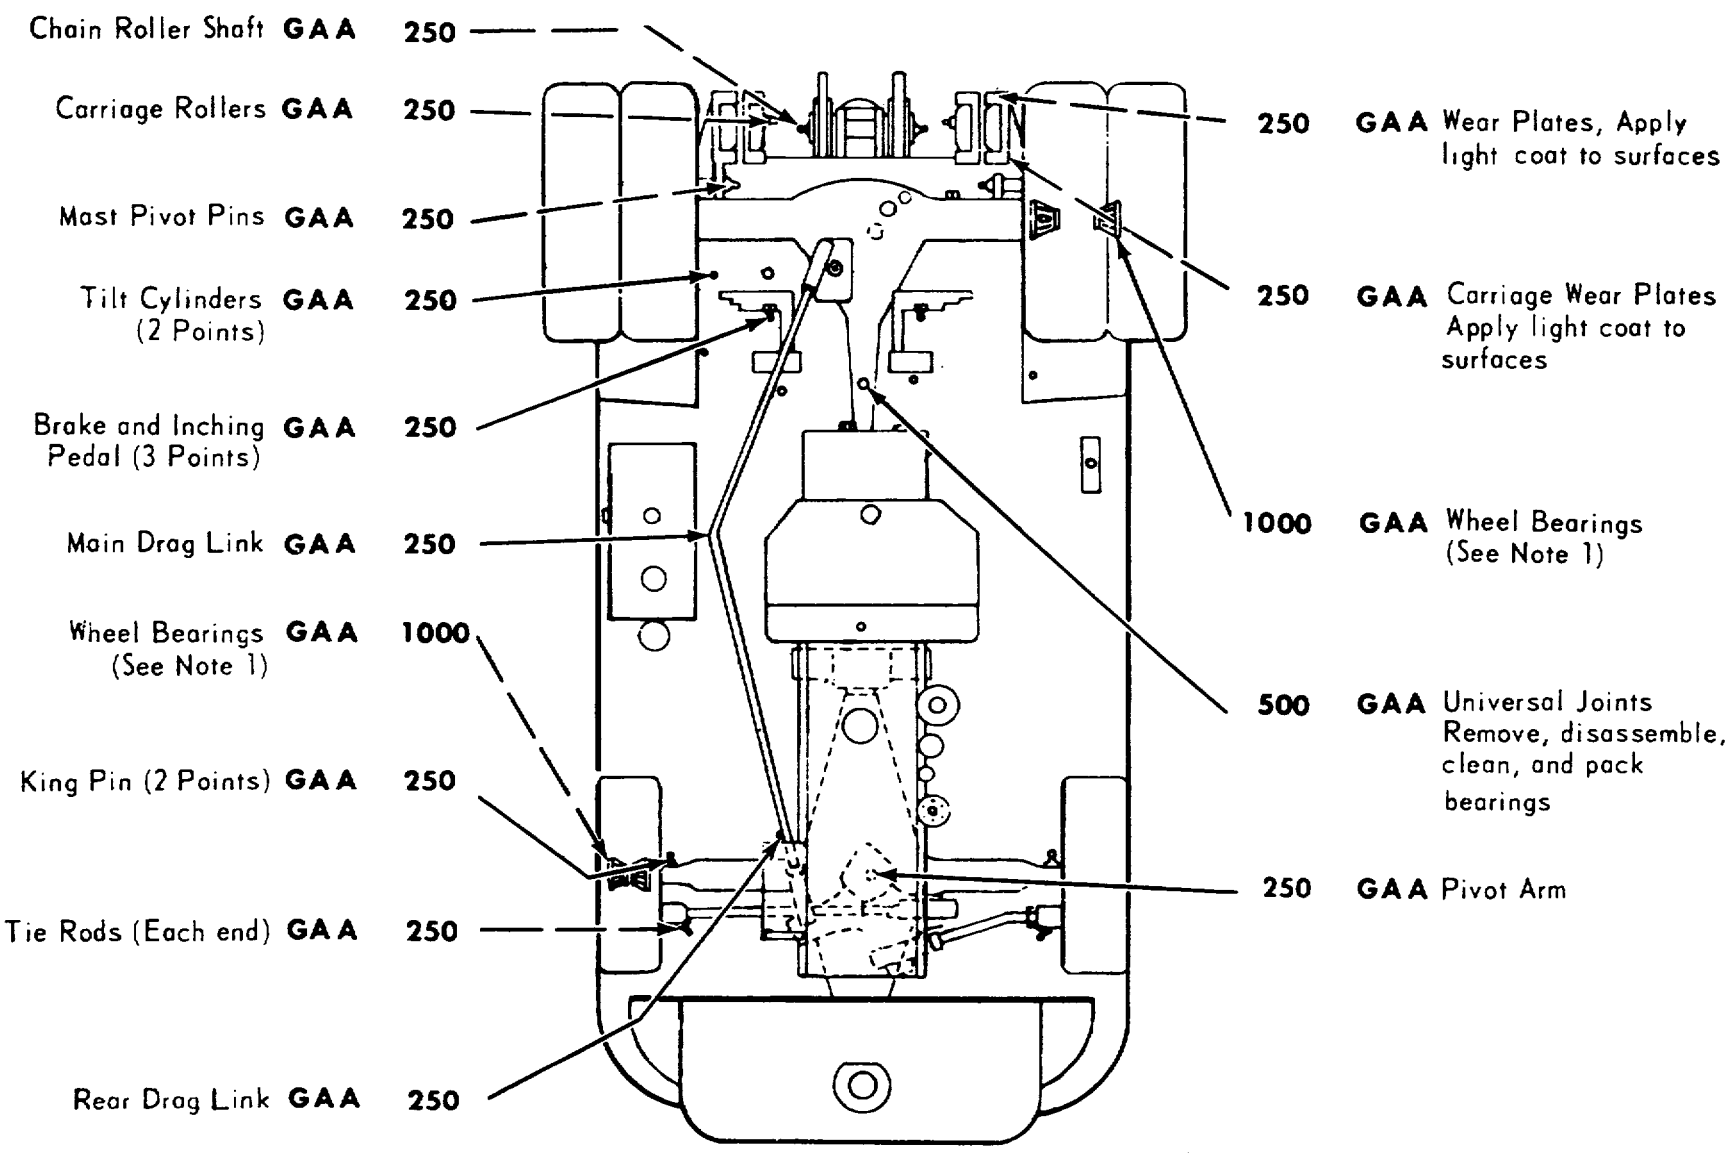
FOLD FOLD