LUBRICATION ORDER

L05-3825-222-12

11 OCTOBER 1968

SWEEPER, ROTARY, TOWED: GASOLINE DRIVEN; 8 FT LG, 30 IN DIA, ADJUSTABLE BRUSH; (MUNICIPAL SUPPLY MODEL KGV) W/ENGINE WISCONSIN MODEL MVF 4D

Reference: C9100-IL

Intervals are based on normal hours of operations. Adjust to compensate for abnormal operations and severe conditions. During inactive periods, sufficient lubrication must be performed for adequate preservation.

Clean fittings before lubricating.

Relubricate after washing.

A dotted circle indicates a drain below.

Clean parts with SOLVENT, dry-cleaning, or with OIL, fuel, Diesel. Dry before lubricating.

Lubricate points indicated by dotted arrow shafts on both sides of equipment.

Drain crankcase and gearcase when hot. Fill and check level.
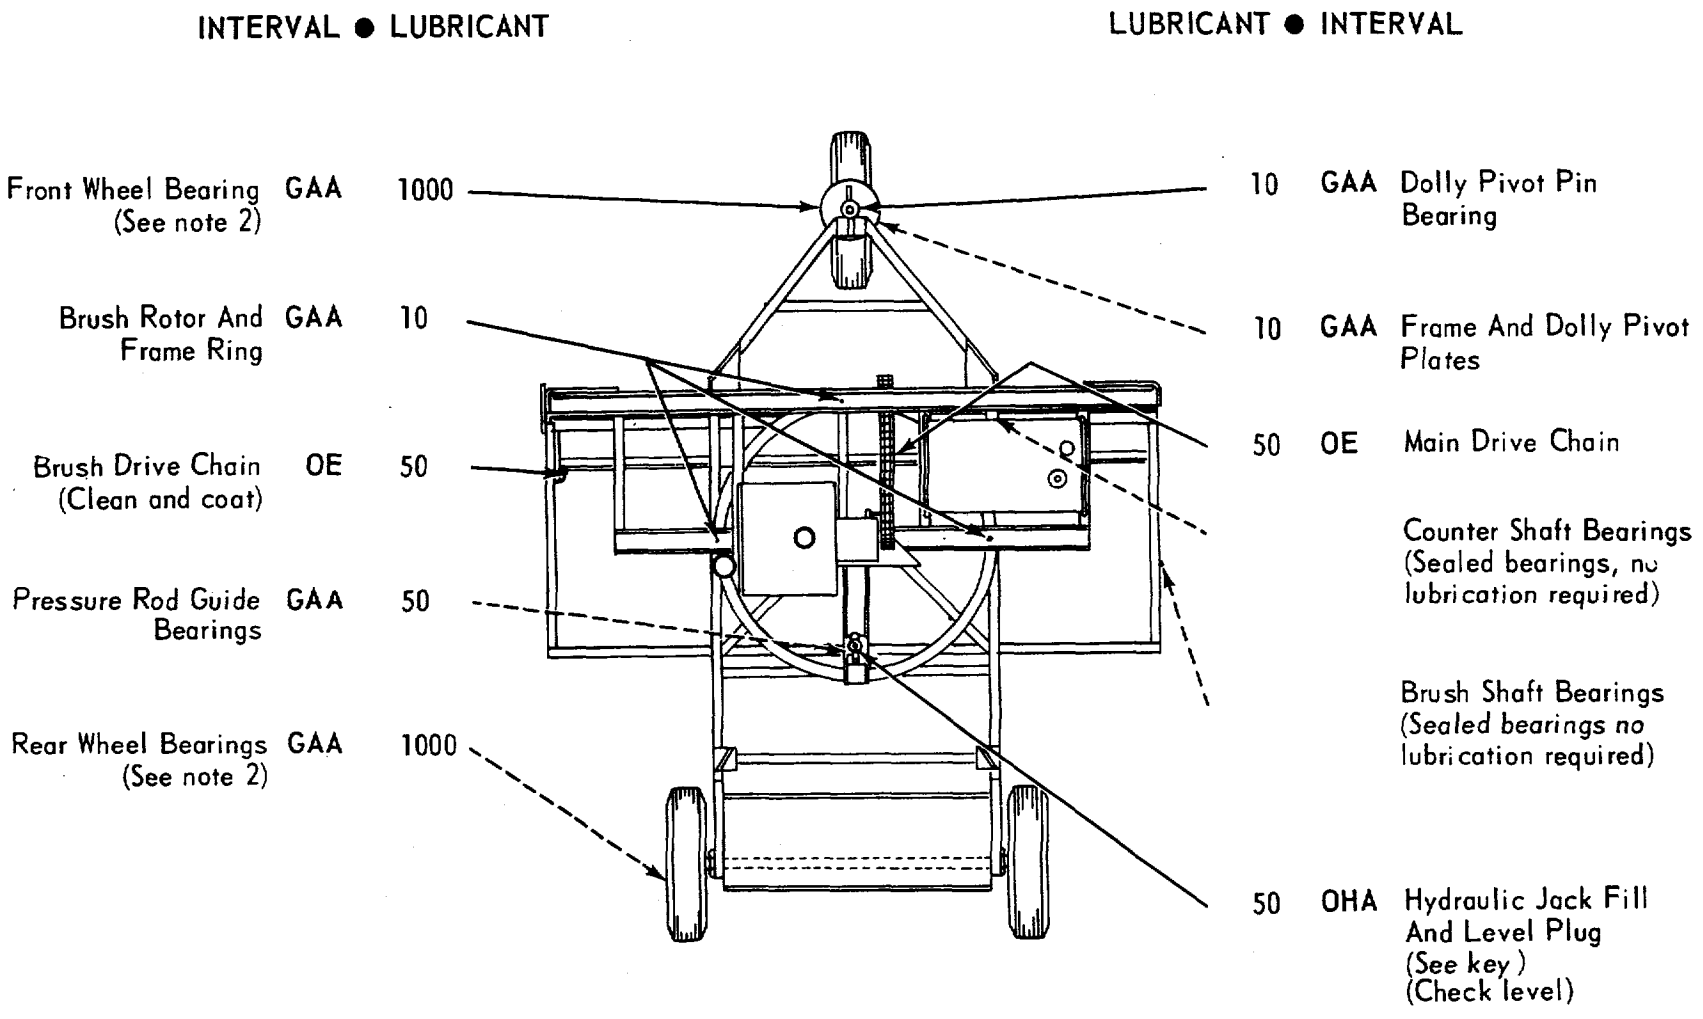
FOLD FOLD