

LUBRICATION ORDER

LO 5-3805-274-12

16 DEC 83

(Supersedes LO 5-3805-274-12,8 September 1980)

Dump Truck Body M917 (NSN 3805-01-028-4389)

Reference: TM 5-3805-274-10, and -24&P, LO 9-2320-273-12 and FEDERAL SUPPLY CATALOG C9100-IL.

Hard time intervals and the related man-hour times are based on normal operation. The man-hour time specified is the time you need to do all the services prescribed for a particular interval. Change the hard time interval if your lubricants are contaminated or if you are operating the equipment under adverse operating conditions, including longer-than-usual operating hours. The hard time interval may be extended during periods of low activity. If extended, adequate preservation precautions must be taken.

WARNING

Dry cleaning fluid is flammable. Do not use near a flame or excessive heat. Use only with adequate ventilation. Avoid prolonged breathing of vapors and minimize skin contact.

Clean parts or fittings with dry cleaning solvent (SD), **Type II** or equivalent. Dry before lubricating. Dotted arrow shafts indicate lubrication on both sides of equipment. A dotted circle indicates a drain below. Relubricate: all items found contaminated after fording or washing.

The lowest level of maintenance authorized to lubricate a point is indicated by one of the following symbols as appropriate: Operator/Crew (C); and Organizational Maintenance (O).

Reporting errors and recommending improvements. You can help improve this manual. If you find any mistakes, or if you know of a **way** to improve the procedures, please let us know. Mail your letter or DA Form 2028 (Recommended Changes to Publications and Blank Forms) direct to: Commander, US Army Tank-Automotive Command, ATTN: DRSTA-MB, Warren, MI 48090. A reply will be furnished to you.

'The time specified is the time required to perform all services at the particular interval.

*TOTAL MAN-HOURS	
INTERVAL	MAN-HOURS
D	0.5
W	0.8


TA219625

WARNING

When pusher axle is up do not step on tire to climb into dump body. Wheel and tire can turn and cause you to slip and fall. Be sure of your footing before climbing on vehicle.

LUBRICANT•INTERVAL

INTERVAL•LUBRICANT

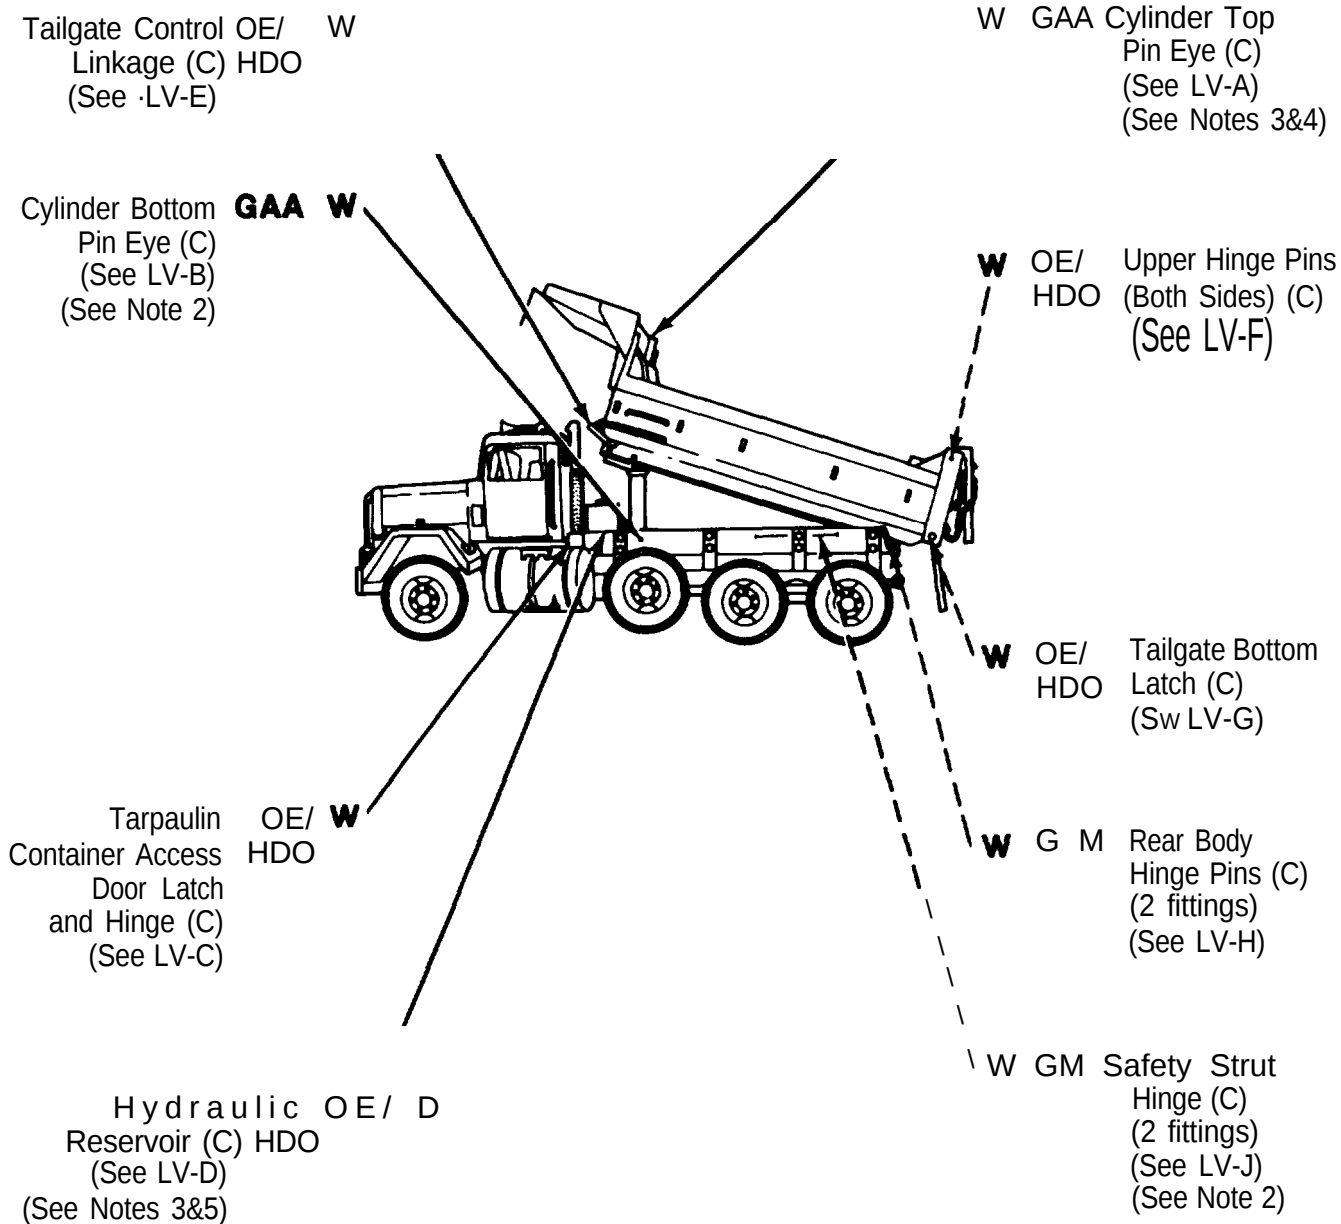

•LV - Locator views, to assist the user, are found immediately after the last illustration

TA219626