LUBRICATION ORDER

LO 10-7360-201-20-2)

30 AUGUST 1990

(Supersedes LO 10-7360-201-20-2, Feb. 66)

BAKERY PLANT, TRAILER-MOUNTED, M-1945: DOUGH MIXING AND MAKEUP OUTFIT (DIVIDER)

REFERENCE: L010-7360-201-20-1,-3,-4,-5,-6. C9100-IL

Approved for public release; distribution is unlimited.

Intervals are based on normal operation. Reduce to compensate for abnormal operation and severe conditions. During inactive periods, sufficient lubrication must be performed for adequate preservation.

Relubricate after washing or fording.

Clean fittings before lubricating.

Clean parts with SD (Solvent, dry cleaning).

Dry before lubricating.

Broken arrow shafts indicate lubrication points on both sides of the equipment.

LUBRICANT - INTERNAL

Divider Lever Fitting (See Note 4)	**GAA**	W,Q
Duster Levers (See Note 3)	**GAA**	W,Q
Upper Bar with Eccentric Collar (See Note 4)	**GAA**	W,Q
Lower Bar with Eccentric Collar (See Note 4)	**GAA**	W,Q
Motor Bearing Recesses (See Note 2)	**GAA**	S

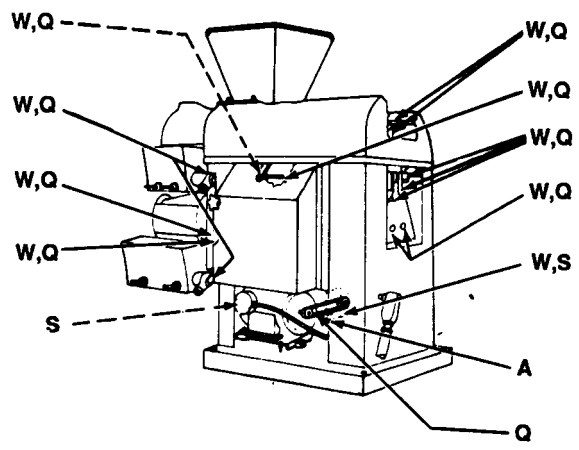

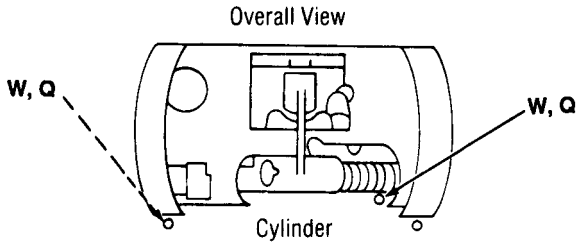

Cylinder Bearing Block Stud Fitting (See Note 4)	**GAA**	W, Q

INTERNAL - LUBRICANT

OE	Connecting Links (See Note 3)
GAA	Crankshaft Bearing Fitting (See Note 4)
GAA	Connecting Links (See Note 4)
GAA	Compression Spring Rod Fittings (See Note 4)
GO	Gear Reduction Unit (Fill and Level) (Check Level) (See Note 5)
GO	Gear Reduction Unit drain (Drain and Refill) (See Note 5)
OE	Drive Chain (See Note 1)
GAA	Lever Connecting Stud (See Note 4)