LUBRICATION ORDER

LO10-7360-201-20-4

30 AUGUST 1990

(Supersedes L010-7360-201-20-4, 4 Feb. 66)

BAKERY PLANT, TRAILER-MOUNTED, M-1945: DOUGH MIXING AND MAKEUP OUTFIT (MONORAIL AND TRAILER CHASSIS)

REFERENCE: L010-7360-201-20-1,-2,-3,-5,-6. C9100-IL

Approved for public release; distribution is unlimited.

Intervals are based on normal operation. Reduce to compensate for abnormal operation and severe conditions. During inactive periods, sufficient lubrication must be performed for adequate preservation.

Relubricate after washing or fording.

Clean fittings before lubricating

Clean parts with SD (Solvent, drycleaning).

Dry before lubricating.

Broken arrow shafts indicate lubrication points on both sides of the equipment.

LUBRICANT - INTERVAL

Front Leveling-Support Jacks (See Note 3) **GAA**



Front (C-Type) Leveling-Support Jacks

Monorail Link Bushings (See Note 6) **GAA**

Work Platform Support Hinges (See Note 2) **OE**

Rear Leveling-Support Jacks See Note 3) **GAA**

Pintle (See Note 2) **OE**

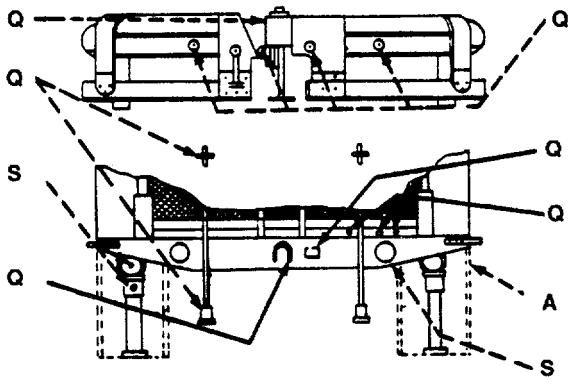

Caster Wheel Swivel Fitting (See Note 3) **GAA**

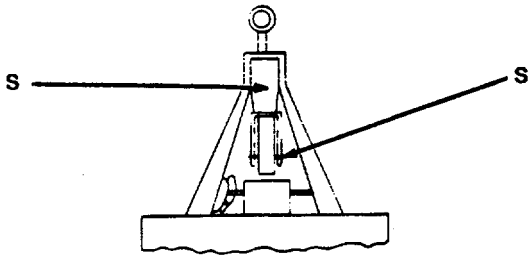

Chassis and Monorail

INTERVAL- LUBRICANT

GAA Monorail Fittings (See Note 1)

HBA Master Cylinder (See Note 5)

OE Work Platform Hinge (See Note 2)

GAA Wheel Bearings (Remove, Clean, and Pack)(See Note 3)

GAA Spring Hangers and Brackets (See Note 3)

GAA Caster Wheel Bearing Fitting (See Note 3)

Card 1 of 2