

BAKERY PLANT, TRAILER-MOUNTED, M-1945: (BAKERY OVEN)

REFERENCE: LO10-7360-201-20-1,-2,-3,-4,-6. C9100-IL

Approved for public release; distribution is unlimited.

Intervals are based on normal operation. Reduce to compensate for abnormal operation and severe conditions. During inactive periods, sufficient lubrication must be performed for adequate preservation.


Clean fittings before lubricating.

Clean parts with SD (Solvent. drycleaning).

Dry before lubricating.

Relubricate after washing or fording

Broken arrow shafts indicate lubrication points on both sides of the equipment.

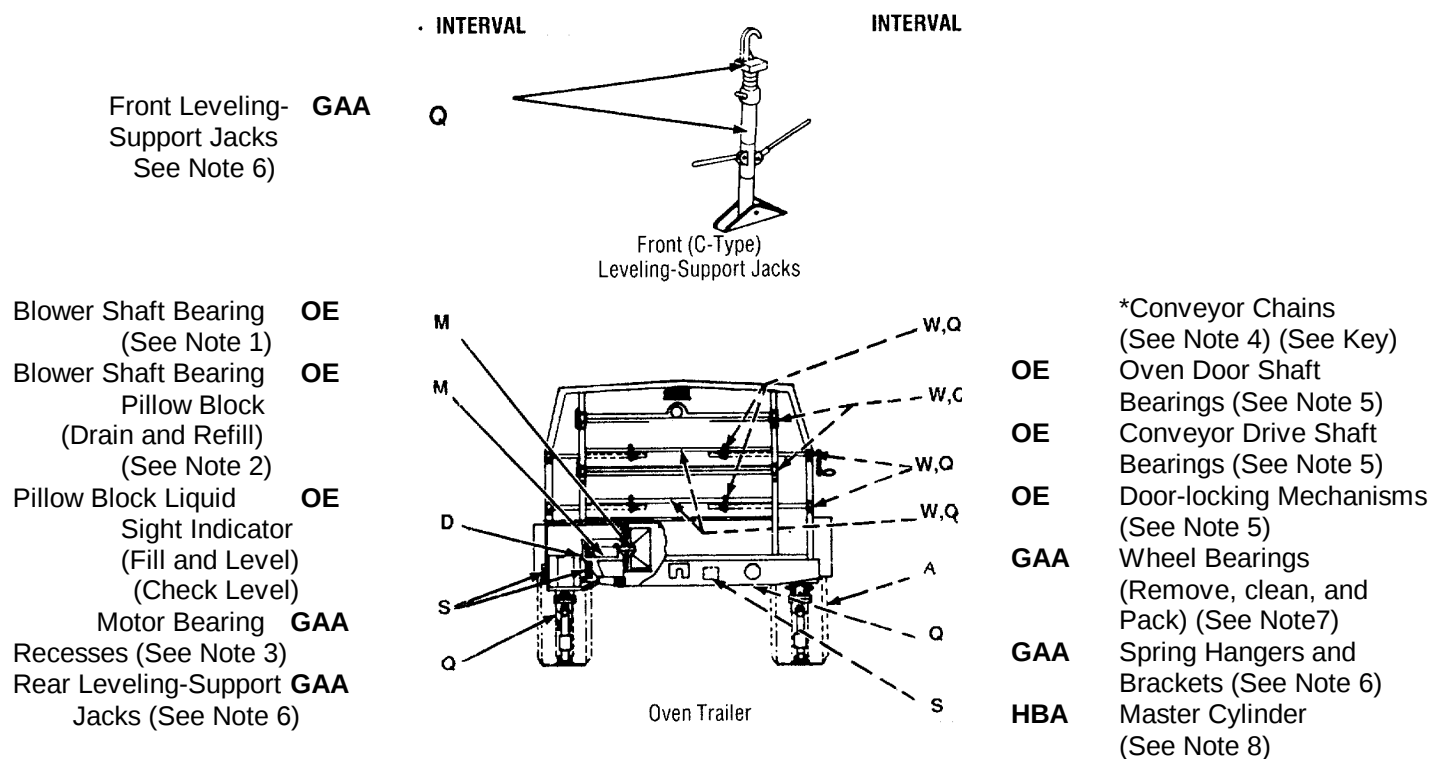

-KEY-

LUBRICANTS	EXPECTED TEMPERATURES	INTERVAL D-Daily
	ALL TEMPERATURES	
OE-LUBRICATING OIL, Internal Combustion Engine	OE 30 OR 9250	W-Weekly (See notes 4 and 5) M-Monthly Q-Quarterly S-Semi-annually A-Annually
GAA-GREASE, Automotive and Artillery	GAA	
HBA-BRAKE FLUID, Automotive	HBA	
*-GRAPHITE, Colloidal	MIL-L-23398	