

PYROTECHNIC SIGNALS

OPERATOR'S MANUAL

This copy is a reprint which includes current
pages from Change 1.

Supersedes TM 9-1370-206-10, 28 July 1978

Approved for public release, distribution is unlimited.

31 MARCH 1991


TM 9-1370-206-10

DEPARTMENT OF THE ARMY

Table of contents

CHAPTER I	UNPACKING	3
CHAPTER II	DESCRIPTION AND OPERATION	
Section 1.	Self Contained Ground Signals.....	9
Section 2.	Red Star Parachute Illumination Ground Signal	16
Section 3.	Illumination Ground Signals and Kits	19
Section 4.	Smoke and Illumination Marine Signal	28
CHAPTER III	MAINTENANCE (OPERATOR LEVEL).....	33

*This manual supersedes TM 9-1370-206-10, 28 July 1978, including all changes.

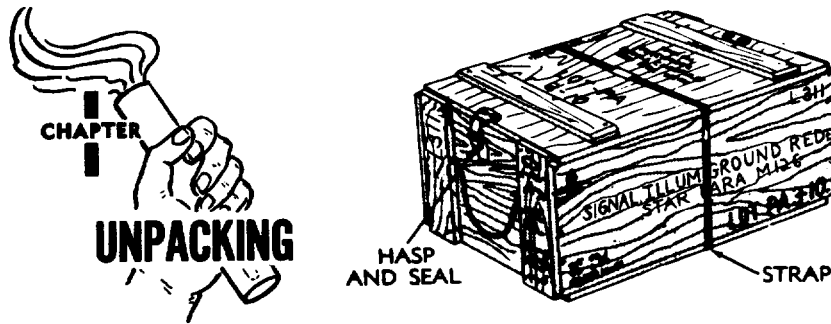


CHAPTER I. UNPACKING

WHEN READY FOR USE

CAUTION


KEEP BOXES SEALED-DUDS OR IMPROPER FUNCTIONING COULD OCCUR IF EXPOSED TO MOISTURE. OPEN JUST BEFORE USE.

- (1) Cut steel strapping carefully with metal shears to avoid springback. Remove and dispose of straps.
- (2) Cut metallic seal with pliers. Discard seal.
- (3) Turn hasp catch and open hasps on hinge and hasp boxes, or pull out on spring latch to release on spring latch boxes.

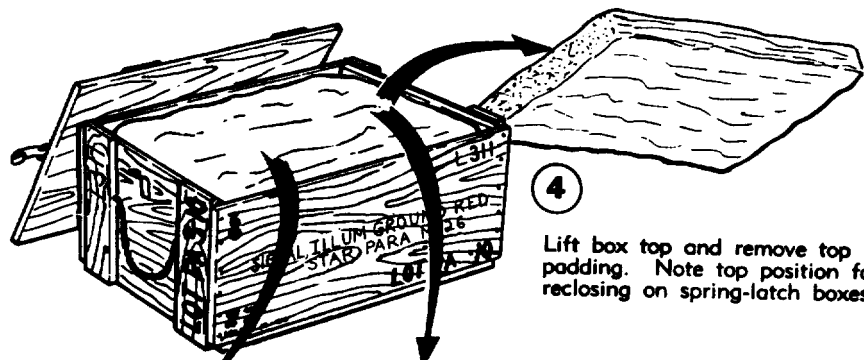

4

Lift box top and remove top padding. Note top position for reclosing on spring-latch boxes.

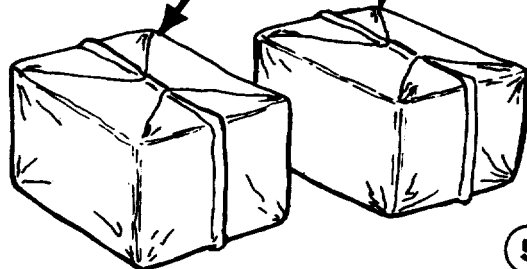


5

Remove inner packs.

U
AR 5305

U
AR 5305

BARRIER BAG

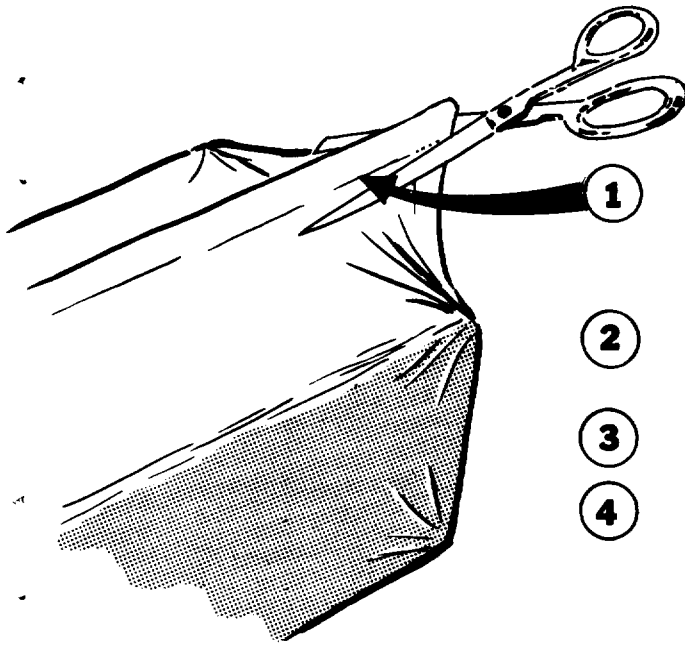

- (1) Cut barrier bag open along the edge with most free area cutting as close to sealed edge as possible.
- (2) Cut or remove tape and open inner container.
- (3) Remove padding, if any.
- (4) Remove items. If all items are not removed, close and reseal barrier bag with adhesive tape.