

DEPARTMENT OF THE ARMY

TM 9-1370-208-10

PHOTOFLASH CARTRIDGES,


SURFACE FLARES

AND

MISCELLANEOUS

PYROTECHNIC

ITEMS

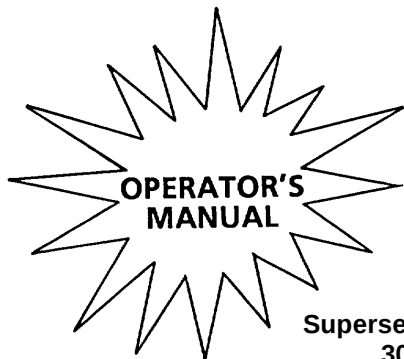

**Supersedes TM 9-1370-208-10.
30 November 1981**

Approved for public release, distribution unlimited

MARCH 1991

**This copy is a reprint which includes current
pages from Change 1.**

***TM 9-1370-208-10**

Technical Manual)
)
No. 1370-208-10)

HEADQUARTERS
DEPARTMENT OF THE ARMY
Washington, DC, 31 March 1991

**OPERATOR'S MANUAL.
FOR
PHOTOFLASH CARTRIDGES. SURFACE FLARES AND
MISCELLANEOUS PYROTECHNIC ITEMS**

*This manual supersedes TM 9-1370-208-10, 30 November 1981.

**U
AR 5337**

TECHNICAL MANUAL

No.1370-208-10

HEADQUARTERS
DEPARTMENT OF THE ARMY
Washington, DC, 31 March 1991

Operator's Manual for Photoflash Cartridges, Surface Flares and Miscellaneous Pyrotechnic Items

REPORTING ERRORS AND RECOMMENDING IMPROVEMENTS

You can help improve this manual. If you find any mistakes or if you know of a way to improve the procedures, please let us know. Mail your letter or DA Form 2028-2 (Recommended Changes to Equipment Technical Publications) directly to Commander, U.S. Army TACOM, Armament Research, Development and Engineering Center, ATTN: AMSTA-AR-WEL-S, Picatinny Arsenal, NJ 07806-5000. You may also send in your recommended changes via electronic mail or by fax. Our e-mail address is LSB@PICA.ARMY.MIL. Our fax number is DSN 880-4633, Commercial (973) 724-4633. A reply will be furnished to you.

Page

CHAPTER I	UPON RECEIPT	
Section 1	Unpacking.....	3
Section 2	Opening Barrier Bag.....	5

	Page
CHAPTER II DESCRIPTION AND OPERATION	
Section 1 Photoflash Cartridges	7
Section 2 Surface Flares	10
Trip Surfaces Flare M49A1	10
Airport Surface Flare M76	30
Section 2.1 Infrared Tracking Flare	32
Ballistic Aerial Target MK33, Mod 0 Flare	32
Section 3 Miscellaneous	33
Fire Starter M2	33
Warning Railroad Fusee, Red, M72	36
CHAPTER III MAINTENANCE	
Operator Level.	39

CHAPTER I




SECTION (1) UNPACKING

**CAUTION:
KEEP BOXES SEAL - DUDS OR
IMPROPER FUNCTIONING
COULD OCCUR IF EXPOSED
TO MOISTURE.
OPEN JUST BEFORE USE**

U
AR 5339

- (1)** Cut steel strapping carefully with metal shears to avoid springback. Remove and dispose of metal straps.
- (2)** Cut antipliferage seal (metallic wire seal) with pliers. Discard seal.
- (3)** Turn hasp catch and open hasps on hinge. To release spring latched boxes pull out spring latch.

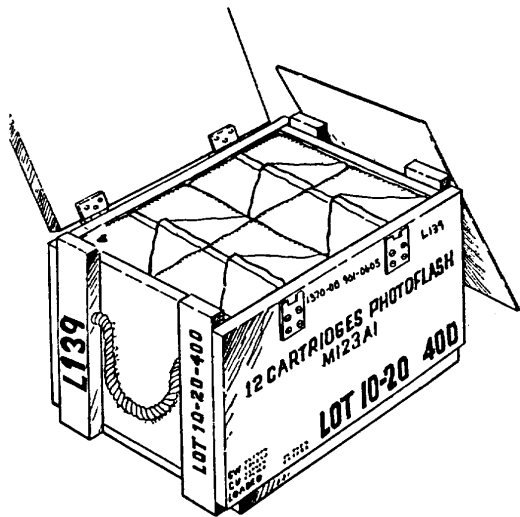

- (4) Lift box top and remove top filler. Note top position for reclosing on springlatch boxes.
- (5) Remove barrier bagged inner pack if ready for immediate use.

U
AR 5340

**PROCEED
TO STEP 1** ➔