

LUBRICATION ORDER

L09-1430-588-12

23 July 1984 (Supersedes LO9-1430-588-12. 19 DECEMBER 1980)

RADAR SET AN/MPQ-49
(NSN 1430-00-179-4199)

Reference: TM 9-1430-588-10 and TM 91430-588-20 Series

INTERVALS (ON-CONDITION OR HARD TIME) AND THE RELATED MAN-HOUR TIMES are based on normal operation. The man-hour time specified is the time you need to do all the services prescribed for a particular interval. On-condition (OC) oil sample intervals shall be applied unless changed by the Army Oil Analysis Program (AOAP) laboratory. Change the hard time Interval if your lubricants are contaminated or If you are operating the equipment under adverse operating conditions. Including longer-than-usual operating hours. The hard time interval My be extended during periods of low activity. If extended, adequate preservation precautions must be taken. Hard time Intervals will be applied in the event AOAP laboratory support is not available.

Clean fittings before lubrication.


Clean parts with dry cleaning solvent (SD), type II or equivalent.

Dry before lubricating.
Lubrication on both sides or for hidden view lubrication point is indicated by dashed leader lines.

Relubricate after washing or fording.

The lowest level of maintenance authorized to lubricate a point is indicated by one of the following symbols as appropriate: Operator/crew (C): and Organizational Maintenance (O).

REPORTING ERRORS AND RECOMMENDING IMPROVEMENTS. You can help improve this manual. If you find any mistakes or it you know of a way to improve the procedures, please let us know. Mail your letter or DA Form 2028 (Recommended Changes to Publications and Blank forms) direct to: Commander. U.S. Army Missile Command, ATTN: DRSMI-SNPM. Redstone Arsenal. AL 35898. A reply will be furnished to you

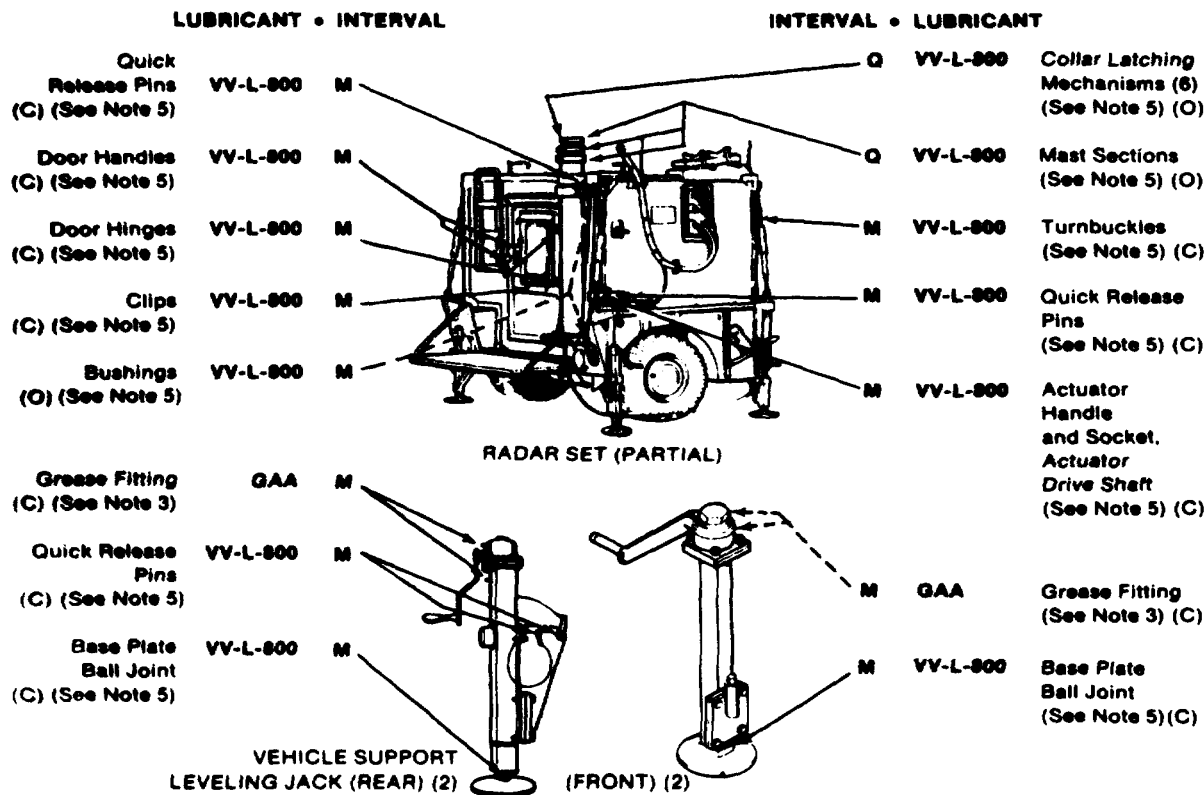

MS 01623468