


This copy is a reprint which includes current
pages from Change 1.

ARMY TM 9-2815-252-24
AIR FORCE TO 38G1-92-2

TECHNICAL MANUAL

UNIT, DIRECT SUPPORT AND GENERAL SUPPORT
MAINTENANCE INSTRUCTIONS

DIESEL ENGINE
MODEL DN2M
2 CYLINDER 0.9 LITER
NSN: 2815-01-350-2205

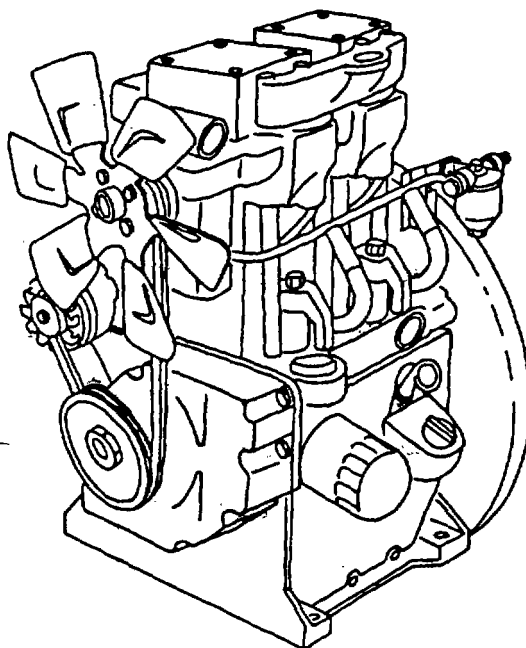

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

HEADQUARTERS, DEPARTMENTS OF THE ARMY
AND AIR FORCE

1 SEPTEMBER 1993

TECHNICAL MANUAL

NO. 9-2815-252-24

HEADQUARTERS
DEPARTMENTS OF THE ARMY AND THE AIR FORCE
WASHINGTON, D.C., 1 September 1993

TECHNICAL MANUAL

Unit, Direct Support and General Support
Maintenance Instructions

**DIESEL ENGINE
MODEL DN2M
2 CYLINDER, 0.9 LITER
NSN: 2815-01350-2205**

REPORTING ERRORS AND RECOMMENDING IMPROVEMENTS

You can help improve this manual. If you find any mistakes or if you know of a way to improve these procedures, please let us know.

(A) Mail your letter or DA Form 2028 (Recommended Changes to Publications and Blank Forms), or DA Form 2028-2 located in the back of this manual directly to: Commander, US Army Aviation and Troop Command, ATTN: AMSAT-I-MP, 4300 Goodfellow Blvd., St. Louis, MO 63120-1798. You may also submit your recommended changes by E-mail directly to <mpmt%avma28@st-louisemh7.army.mil>. Instructions for sending an electronic 2028 may be found at the back of this publication immediately preceding the hard copy 2028.

(F) Air Force AFTO Form 22 Directly to: Commander, Sacramento Air Logistics Center, ATTN: TILBA, McClellan AFB, CA 95652-5990 (AFMC)

A reply will be furnished directly to you.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

TABLE OF CONTENTS

	PAGE
Chapter 1	INTRODUCTION 1-1
Section I.	General Information..... 1-1
1-1.	Scope. 1-1
1-2.	Maintenance Forms, Records and Reports 1-1
1-3.	Reporting Equipment Improvement Recommendations (Eir)..... 1-1
1-4.	Destruction Of Army Materiel To Prevent Enemy Use 1-1
1-5.	Preparation For Storage Or Shipment 1-1
1-6.	Warranty..... 1-1
Section II.	Equipment Description And Data 1-2
1-7.	General 1-2
1-8.	Detailed Description..... 1-2
1-9.	Equipment Data..... 1-4

TABLE OF CONTENTS - continued

	PAGE
Section III. Preparation For Use.....	1-5
1-10. Inspecting and Servicing Engine	1-5
CHAPTER 2 OPERATION	1-1
Section I. Principles Of Operation.....	1-1
2-1. Introduction.....	2-1
2-2. Cooling System	2-1
2-3. Lubrication System	2-1
2-4. Fuel System.	2-1
2-5. Electrical System.....	2-1
Section II. Operating Instructions.....	1-2
CHAPTER 3 MAINTENANCE.....	3-1
Section I. Preventive Maintenance Checks and Services (PMCS)	3-1
3-1. Pmcs Procedures	3-1
Section II. Troubleshooting	3-2
3-2. Troubleshooting Procedures	3-2
Section III. General Maintenance	3-11
3-3. General	3-11
3-4. Disassembly and Assembly Sequence for Overhaul.	3-12
3-5. Crankcase Vacuum.....	3-14
Section IV. Intake And Exhaust System Maintenance	3-15
3-6. Intake Manifold.....	3-15
3-7. Exhaust Manifold.....	3-16
Section V. Cooling System Maintenance.....	3-17
3-8. General	3-17
3-9. Thermostat.	3-18
3-10. Water Pump.	3-20
Section VI. Fuel System Maintenance	3-21
3-11. General	3-21
3-12. Bleeding and Priming Fuel System.	3-21
3-13. Fuel Injection Pump.....	3-22
3-14. Fuel Injection Pump Timing	3-26
3-15. Fuel Supply Lines	3-28
3-16. Fuel Filter.	3-29
3-17. Fuel Injector.....	3-30
3-18. Fuel Injector Pipes and Fuel Return Line	3-33
3-19. Fuel Solenoid	3-34
Section VII. Lubrication System Maintenance	3-36
3-20. Oil Filter and Crankcase Door	3-36
3-21. Oil Pump and Strainer	3-38

3-22.	Engine Oil Pressure Test	3-40
Section VIII.	Governor System Maintenance	3-40
3-23.	Governor System.....	3-40
Section IX.	Electrical System Maintenance	3-45
3-24.	Starter Assembly.	3-45
Section X.	Engine Subassembly Maintenance	3-52
3-25.	CYLINDER COVER	3-52
3-26.	ROCKER LEVER	3-52
3-27.	CYLINDER HEAD ASSEMBLY.....	3-54
3-28.	GEAR END COVER	3-61
3-29.	CAMSHAFT ASSEMBLY.....	3-64
3-30.	PISTON AND CONNECTING ROD ASSEMBLIES	3-66
3-31.	FLYWHEEL HOUSING.....	3-71
3-32.	MAIN BEARING HOUSING.	3-72
3-33.	CRANKSHAFT	3-76
3-34.	CRANKCASE ASSEMBLY.	3-79
APPENDIX A	REFERENCES	A-1
APPENDIX B	MAINTENANCE ALLOCATION CHART	B-1
APPENDIX C	EXPENDABLE/DURABLE SUPPLIES AND MATERIALS LIST	C-1
APPENDIX D	MAINTENANCE PROCEDURE AND AUTHORIZED LEVEL OF MAINTENANCE.....	D-1
APPENDIX E	TORQUE CHART	E-1
INDEX		Index-1

LIST OF ILLUSTRATIONS

FIGURE		PAGE
1-1.	Engine Components	1-3
3-1.	Locally Manufactured Water Manometer	3-15
3-2.	Intake Manifold	3-16
3-3.	Exhaust Manifold	3-17
3-4.	Cooling System	3-19
3-5.	Priming Fuel System	3-22
3-6.	Engine Speed Stop	3-23
3-7.	Fuel Injection Pump, Fuel Filter, and Supply Lines	3-24
3-8.	Fuel Pump Tappet and Stud	3-25
3-9.	Setting Pump Rack	3-25
3-10.	Checking Piston Drop	3-27
3-11.	Fuel Injector Pump Dimensions	3-28
3-12.	Fuel Filter	3-29
3-13.	Fuel Injectors, Fuel Injector Pipes, and Fuel Return Line	3-32
3-14.	Fuel Solenoid Installation	3-35
3-15.	Oil Filter and Crankcase Door	3-37
3-16.	Crankcase Door Fastener Tightening Sequence	3-38
3-17.	Strainer and Oil Pump	3-39
3-18.	Oil Pressure Test Setup	3-40
3-19.	Governor System	3-42
3-20.	Governor Weights	3-43
3-21.	Starter Connection and Mounting Hardware	3-46
3-22.	Starter Assembly	3-47
3-23.	Starter Solenoid Test Circuit	3-48
3-24.	Solenoid Terminals	3-49
3-25.	Overrunning Clutch	3-50
3-26.	Checking Pinion Gap	3-52
3-27.	Cylinder Cover and Rocker Lever	3-53
3-28.	Cylinder Head Assembly	3-56
3-29.	Valve Guide Tool and Depth Stop	3-57
3-30.	Checking Cylinder Head Clearance	3-59
3-31.	Cylinder Head Bolt Tightening Sequence	3-61
3-32.	Gear End Cover	3-62
3-33.	Gear End Cover Capscrew Tightening Sequence	3-63
3-34.	Camshaft Assembly	3-64
3-35.	Measuring Gear Backlash	3-66

LIST OF ILLUSTRATIONS - continued

FIGURE		PAGE
3-36.	Piston and Connecting Rod Assemblies	3-68
3-37.	Piston Ring and Gap Location	3-69
3-38.	Flywheel Housing	3-72
3-39.	Center Bearing Tube	3-73
3-40.	Crankshaft	3-74
3-41.	Main Bearing Tool	3-75
3-42.	Bearing Housing Capscrew Tightening Sequence	3-76
3-43.	Crankcase Assembly	3-80

LIST OF TABLES

TABLE		PAGE
1-1.	Equipment Data	1-4
3-1.	Preventive Maintenance Checks and Services (PMCS)	3-1
3-2.	Troubleshooting	3-3
3-3.	Color Coded Shim Packs for Fuel Pump	3-26
3-4.	Cylinder Head Component Wear Limits	3-58
3-5.	Camshaft Component Wear Limits	3-65
3-6.	Piston and Connecting Rod Component Wear Limits	3-70
3-7.	Crankshaft Component Wear Limits	3-78
E-1.	Specifications	E-1

v/(vi blank)

CHAPTER 1

INTRODUCTION

Section I. GENERAL INFORMATION

1-1. SCOPE.

1-1.1. Type of Manual. This manual contains unit, direct support and general support maintenance instructions for the Model DN2M Diesel Engine, hereafter referred to as engine. Also included are descriptions of major systems/components and their functions in relation to other systems/components.

1-1.2. Purpose of Equipment. The engine provides a driving force for generators or other equipment requiring this size (12 HP) and compatibility.

1-2. MAINTENANCE FORMS. RECORDS AND REPORTS.

1-2.1. Reports of Maintenance and Unsatisfactory Equipment. Department of the Army forms and procedures used for equipment maintenance will be those prescribed by DA Pam 738-750, the Army Maintenance Management System (TAMMS). Air Force personnel will use AFR 66-1, Maintenance Management Policy, for maintenance reporting and TO-00-35D54 for unsatisfactory equipment reporting.

1-2.2. Reporting of Item and Packaging Discrepancies. Fill out and forward SF 364, Report of Discrepancy (ROD), as prescribed in AR 735-11-2/DLAR 414-55/SECNAVINST 4355.1 8/AFR 400-54/MCO 4430.3J.

1-2.3. Transportation Discrepancy Report (TDR) (SF 361). Fill out and forward Transportation Discrepancy Report (TDR) (SF 361) as prescribed in AR 55-38/NAVSUPINST 4610.33C/AFR-75-18/MCO P4610.19D/DLAR 4500.15.

1-3. REPORTING EQUIPMENT IMPROVEMENT RECOMMENDATIONS (FIR).

1-3.1. Army. If your Military Standard Engine needs improvement, let us know. Send us an EIR. You, the user, are the only one who can tell us what you don't like about your equipment. Let us know why you don't like the design or performance. Put it on an SF 368 (Product Quality Deficiency Report). Mail it to us at: Commander, U.S. Army Aviation and Troop Command, ATTN: AMSAT-I-MDO, 4300 Goodfellow Boulevard, St. Louis, Missouri 63120-1798. We will send you a reply.

1-3.2. Air Force. Air Force personnel are encouraged to submit EIR's in accordance with AFR 900-4.

1-4. DESTRUCTION OF ARMY MATERIEL TO PREVENT ENEMY USE.

Refer to TM 750-244-3 for procedures to destroy equipment to prevent enemy use.

1-5. PREPARATION FOR STORAGE OR SHIPMENT,

Refer to TB 740-97-2 for procedures to place the equipment into storage.

1-6. WARRANTY.

The engine is warranted for a specific period of time. Refer to the end item warranty technical bulletin. The warranty starts on the date found in block 23, DA Form 2408-9, in the equipment log book. Report all defects in material or workmanship to your supervisor, who will take appropriate action.

Section II. EQUIPMENT DESCRIPTION AND DATA

1-7. GENERAL.

The diesel engine (FIGURE 1-1) is two cylinder, four cycle, fuel injected, naturally-aspirated and liquid-cooled. The firing order is 1-2. The number one cylinder is toward the fan end of the engine. The serial number is found on right side of the cylinder body at number one cylinder location. Rotation of engine is counterclockwise as viewed from flywheel.

NOTE

All locations referenced herein are given facing the flywheel end (rear) of the engine.

1-8. DETAILED DESCRIPTION.

1-8.1. Cooling System. The cooling system consists of a radiator, water pump, cooling fan, thermostat and connecting hoses. The fan is mounted on shaft of water pump and both are belt driven from the crankshaft pulley. The thermostat controls engine temperature and is installed in the top of engine. The function of the cooling system is to maintain a specific operating temperature of 170° to 220°F (77° to 104°C) for the engine.

1-8.2. Lubrication System. The lubrication system consists of the oil sump, a gear type oil pump, pressure relief valve, spin-on type oil filter and internal passages within the engine.

1-8.3. Fuel System. The function of the fuel system is to inject a metered quantity of clean atomized fuel into the engine cylinders at a precise time near the end of the compression stroke of each piston. The fuel system consists of the fuel tank, electrically driven transfer pump, fuel filter/water separator, fuel filter, and a fuel injection pump and fuel injector for each cylinder. The fuel tank, transfer pump and fuel filter/water separator are not mounted on engine.

1-8.4. Electrical System. The electrical system is 24 VDC operation and consists of a battery charging alternator, starter, externally mounted battery and other items as required. The battery charging alternator is mounted on front of engine and is belt driven. When the engine is operating, the battery charging alternator supplies 24 VDC to recharge the battery and maintain it at a full state of charge. The starter is mounted on the flywheel housing and when energized engages the ring gear of the flywheel to rotate the engine.

1. Coolant Inlet
2. Exhaust Manifold
3. Fuel Injection Pumps
4. Fuel Supply Connection
5. Fuel Filter
6. Flywheel Housing
7. Dipstick
8. Oil Filler
9. Crankcase
10. Oil Filter
11. Crankshaft Pulley
12. Water Pump
13. Intake Manifold
14. Cylinder Cover
15. Coolant outlet and Thermostat
16. Fan Drive Pulley
17. Gear End Cover
18. Starter Motor
19. Starter Solenoid
20. Cylinder Head

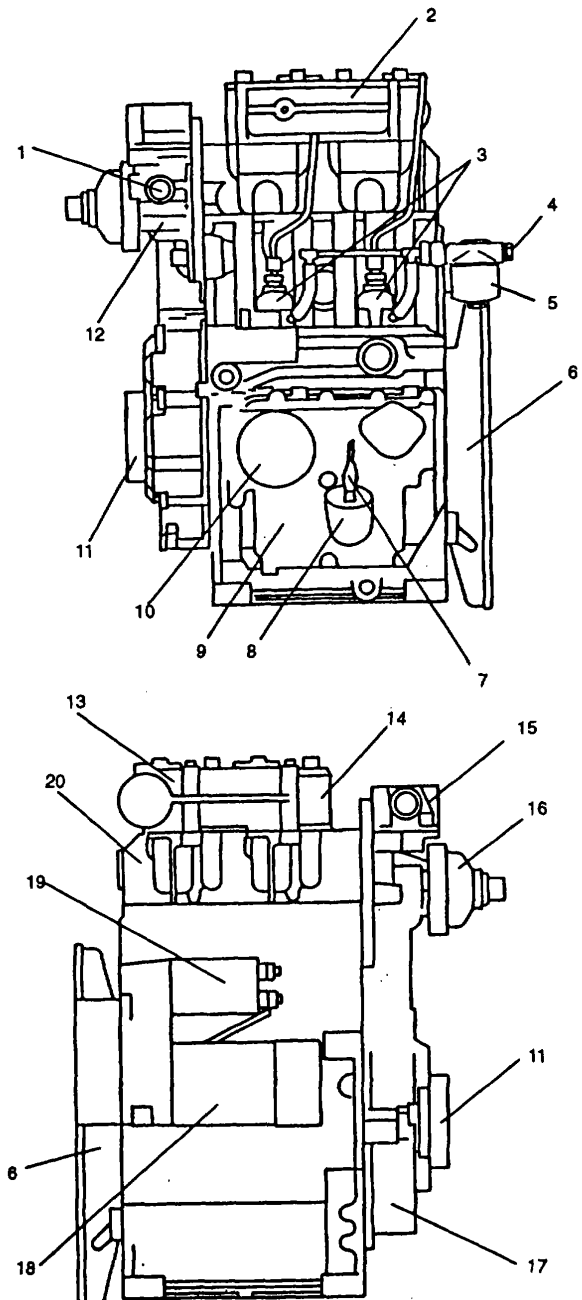


FIGURE 1-1. Engine Components