

TUG, HARBOR, DIESEL, 1200 H. P. STEEL, 100 FT DESIGN 3006
(HULL NUMBERS LT 1936 THRU LT 1977 AND LT 2202)

Reference: FEDERAL SUPPLY CATALOG C9100-IL, L055-1925-204-12-1, 2, 3, 4, 5, 6, 8, TM55-1925-204-12 and TM55-1925-204-34

Intervals are based on normal hours of operations. Adjust to compensate for abnormal operations and severe conditions. During inactive periods, sufficient lubrication must be performed for adequate preservation.

Relubricate after exposure to salt water.


Clean fittings before lubricating.

Clean parts with SOLVENT, Dry-cleaning, Type II, (SD-2).
Dry before lubricating.

Lubricate points indicated by dotted arrow shafts on both sides of equipment.

Drain wet crankcases and gear boxes while the lubricant is still warm from previous use.

FOLD

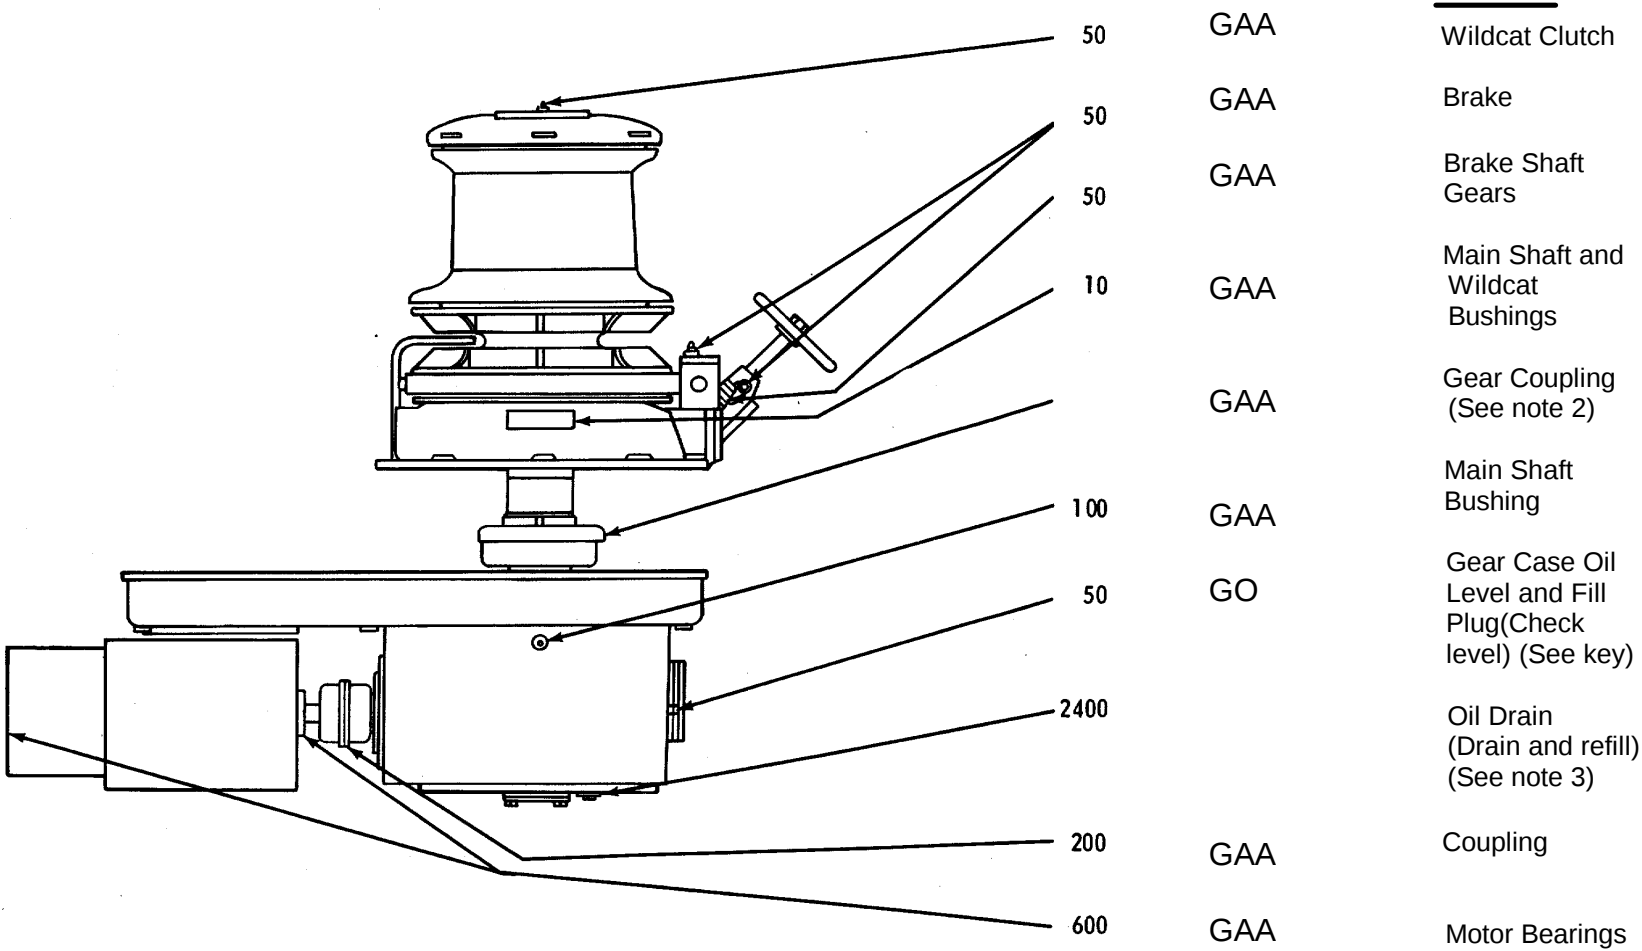

CAPSTAN-WINDLASS, MODEL VEV-16