TUG, HARBOR, DIESEL, 1200 H. P. STEEL, 100 FT DESIGN 3006
(HULL NUMBERS LT 1936 THRU LT 1977 AND LT 2202)

Reference: FEDERAL SUPPLY CATALOG C9100-IL, LO55-1925-204-12-1, 2, 3, 4, 5, 6, 7, TM55-1925-204-12 and TM55-1925-204-34

Intervals are based on normal hours of operation. Adjust to compensate for abnormal operation and severe conditions. During inactive periods, sufficient lubrication must be performed for adequate preservation.

Clean fittings before lubricating.

Relubricate after washing.

Clean parts with SOLVENT, Dry-cleaning, Type II, (SD-2). Dry before lubricating.

FOLD FOLD

LUBRICANT ● INTERVAL INTERVAL ● LUBRICANT

Rotary Pump
(See note 1)

Coupling
(See note 2)

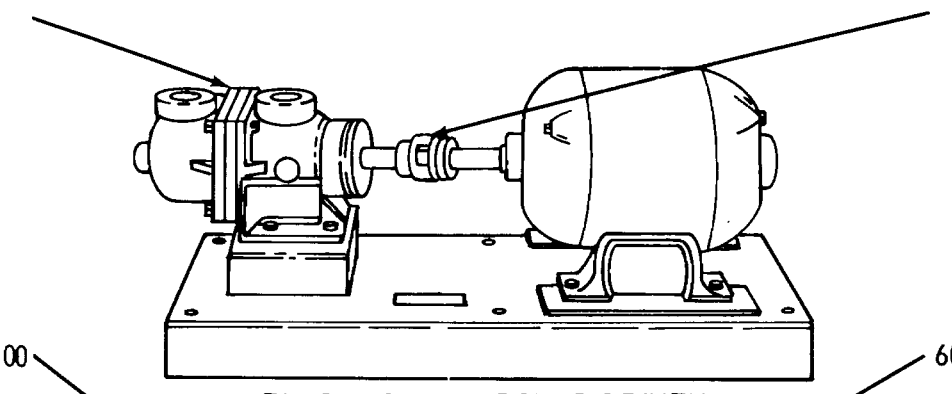

Grease Fitting (1 or 2 strokes of hand grease gun) GAA 600

600 GAA Grease Fitting (1 or 2 strokes of hand grease gun)

PUMP, ROTARY, POWER DRIVEN

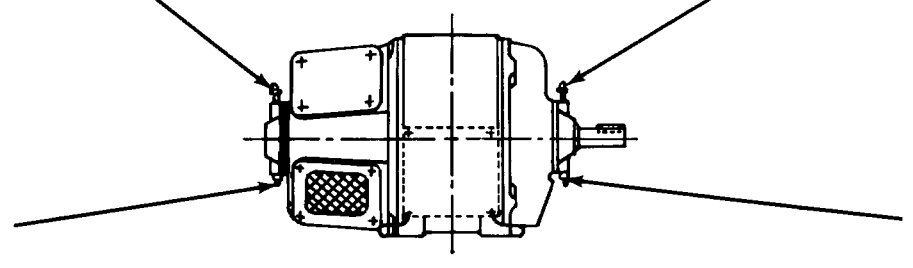

Grease Drain Plug
(See note 3)

Grease Drain Plug
(See note 3)

MOTOR

PUMP-MODELS A313A143 AND A322AX250