


TM 5-2815-240-34&P*

TECHNICAL MANUAL

DIRECT AND GENERAL SUPPORT MAINTENANCE MANUAL (INCLUDING REPAIR PARTS AND SPECIAL TOOLS LIST)

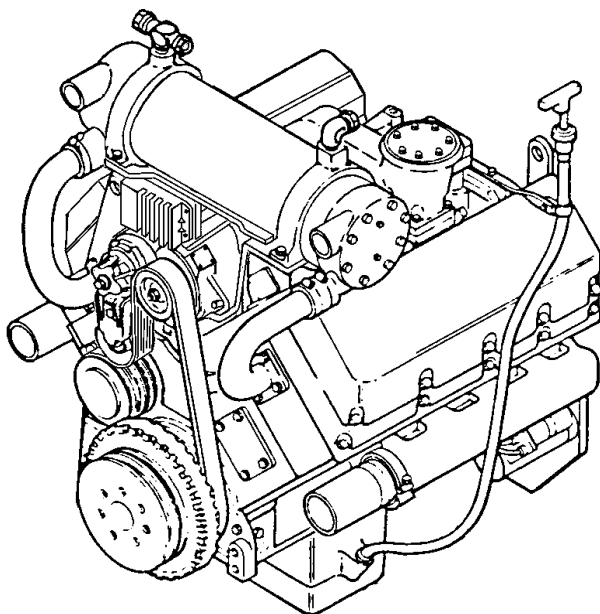

ENGINE, DIESEL, LIQUID COOLED V-TYPE, EIGHT CYLINDER, CUMMINS MODEL V903C W/CONTAINER (NSN 2815-01-399-6801)

*This manual supersedes TM 5-2815-240-34&P dated August 1989 and all related changes.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

HEADQUARTERS, DEPARTMENT OF THE ARMY

This copy is a reprint which includes current pages from Changes 1, 2 and 3.

TABLE OF CONTENTS i

HOW TO USE THIS MANUAL iv

INTRODUCTION 1-1

GENERAL ENGINE MAINTENANCE 2-1

ENGINE MAINTENANCE INSTRUCTIONS 3-1

APPENDIX A REFERENCES A-1

APPENDIX B REPAIR PARTS AND SPECIAL TOOLS LIST B-1

APPENDIX C EXPENDABLE SUPPLIES AND MATERIALS LIST C-1

APPENDIX D CYLINDER HEAD REPAIR SPECIFICATIONS D-1

APPENDIX E FABRICATED TOOLS E-1

INDEX INDEX 1

APRIL 1991

Change 3

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, D.C. 17 April 1991

**DIRECT AND GENERAL SUPPORT MAINTENANCE MANUAL
(INCLUDING REPAIR PARTS AND SPECIAL TOOLS LIST)**

**ENGINE, DIESEL, LIQUID COOLED V-TYPE,
EIGHT CYLINDER, CUMMINS MODEL V903C W/CONTAINER**

(NSN 2815-01-399-6801)

REPORTING OF ERRORS AND RECOMMENDING IMPROVEMENTS

You can improve this manual. If you find any mistakes, or if you know of a way to improve the procedures, please let us know. Submit your DA Form 2028-2 (Recommended Changes to Equipment Technical Publications), through the Internet, on the Army Electronic Product Support (AEPS) website. The Internet address is <http://aeaps.ria.army.mil>. If you need a password, scroll down and click on "ACCESS REQUEST FORM". The DA Form 2028 is located in the ONLINE FORMS PROCESSING section of the AEPS. Fill out the form and click on SUBMIT. Using this form on the ADPS will enable us to respond quicker to your comments and better manage the DA Form 2028 program. You may also mail, fax, or email your letter, DA Form 2028, or DA Form 2028-2 direct to: Commander, U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-AC-NML, Rock Island, IL 61299-7630. The email address is amsta-ac-nml@ria.army.mil. The fax number is DSN 793-0726 or Commercial (309) 782-0726.

DISTRIBUTION STATEMENT A. Approved for public release: distribution is unlimited.

This manual contains a table of contents, list of tasks, appendices, and alphabetical index.

TABLE OF CONTENTS

		Page
CHAPTER 1	INTRODUCTION	
Section I	General Information	1-1
Section II	Equipment Description and Data	1-2
CHAPTER 2	GENERAL ENGINE MAINTENANCE	
Section I	Repair Parts, Special Tools, and Support Equipment.....	2-1
Section II	Service Upon Receipt	2-1
Section III	General Maintenance Instructions.....	2-2
CHAPTER 3	ENGINE MAINTENANCE INSTRUCTIONS	
	Group AU, Powertrain Installation	3-1

*This manual supersedes TM 5-2815-240-34&P dated August 1989 and all related changes.

TABLE OF CONTENTS (Cont'd)

		Page	Illus Figure
APPENDIX A	REFERENCES	A-1	
APPENDIX B	REPAIR PARTS AND SPECIAL TOOLS LIST	B-1	
INTRODUCTION		B-1	
REPAIR PARTS LIST WORK PACKAGE			
Group AU	POWERTRAIN INSTALLATION		
	AUA2 Engine and Shipping Container	1-1	1
	AUA2 Engine Shipping Container Assembly	2-1	2
	AUA2 Starter and Mounting Parts	3-1	3
	AUA2 Alternator, Brackets, and Related Parts	4-1	4
	AUA2 Alternator Assembly	5-1	5
	AUA2 Alternator and Related Parts	6-1	6
	AUA2 Fuel Supply Lines and Fittings	7-1	7
	AUA2 Fuel Drain Lines and Fittings	8-1	8
	AUA2 Fuel Injectors	9-1	9
	AUA2 Fuel Pump, Shutdown Valve, Damper, and Mounting Parts	10-1	10
	AUA2 Fuel Pump Housing	11-1	11
	AUA2 Fuel Pump Cover and Governor	12-1	12
	AUA2 Fuel Pump Gear Pump	13-1	13
	AUA2 Fuel Pump Governor Spring Pack	14-1	14
	AUA2 Air Compressor and Related Parts	15-1	15
	AUA2 Air Compressor Assembly	16-1	16
	AUA2 Intake Manifolds	17-1	17
	AUA2 Exhaust Manifolds	18-1	18
	AUA2 Engine External Oil Lines	19-1	19
	AUA2 Oil Pump	20-1	20
	AUA2 Oil Cooler	21-1	21
	AUA2 Oil Level Indicator	22-1	22
	AUA2 Oil Pan	23-1	23
	AUA2 Engine Coolant Hoses and Clamps	24-1	24
	AUA2 Transmission Oil Cooler with Engine Coolant Thermostats	25-1	25
	AUA2 Transmission Oil Cooler, Mounting Bracket, and Related Parts	26-1	26
	AUA2 Water Headers	27-1	27
	AUA2 Coolant Pump and Belts	28-1	28
	AUA2 Front Cover	29-1	29
	AUA2 Crankshaft	30-1	30
	AUA2 Flywheel and Damper	31-1	31
	AUA2 Pistons and Connecting Rods	32-1	32
	AUA2 Rear Cover	33-1	33
	AUA2 Camshaft	34-1	34
	AUA2 Cylinder Head Covers	35-1	35
	AUA2 Cylinder Head, Valves, and Guides	36-1	36
	AUA2 Push Rods and Tappets	37-1	37
	AUA2 Rocker Levers	38-1	38
	AUA2 Cylinder Block	39-1	39
	AUA2 Engine Data Plates	40-1	40

TABLE OF CONTENTS (Cont'd)

		Page	Illus Figure
Group A7	BULK ITEMS		
	A7 Bulk Materials List (Not Illustrated)	Bulk-1	
Group BB2	REPAIR PARTS KITS		
	BB2 Repair Parts Kits (Not Illustrated)	Kit-1	
	SPECIAL TOOLS LIST WORKS PACKAGE		
Group AY	SUPPORT EQUIPMENT AND SPECIAL TOOLS		
	AY Special Tools - Direct Support/General Support	41-1	41
	CROSS-REFERENCE INDEXES WORK PACKAGE		
	National Stock Number (NSN) Index Work Package	I-1	
	Part Number (PIN) Index Work Package	I-9	
APPENDIX C	DIRECT AND GENERAL SUPPORT MAINTENANCE EXPENDABLE SUPPLIES AND MATERIALS LIST		
Section I	INTRODUCTION	C-1	
Section II	EXPENDABLE/DURABLE SUPPLIES AND MATERIALS LIST	C-2	
APPENDIX D	CYLINDER HEAD REPAIR SPECIFICATIONS		
Section I	INTRODUCTION	D-1	
Section II	REPAIR SPECIFICATIONS FOR CYLINDER HEAD	D-2	
APPENDIX E	FABRICATED TOOLS	E-1	
INDEX		INDEX-1	

HOW TO USE THIS MANUAL

Before starting a task, read **HOW TO USE THIS MANUAL** and **CHAPTER 2, GENERAL ENGINE MAINTENANCE**.

WHAT'S IN THE MANUAL – FRONT TO BACK

SUMMARY OF WARNINGS AND FIRST AID lists the warnings and first aid information in this manual. These warnings contain additional information that could prevent injury or death of personnel. The maintenance task may have a shorter version of these warnings.

TABLE OF CONTENTS lists the chapters, sections, and appendices in this manual. It also lists the pages where chapters, sections, and appendices can be found.

CHAPTER 1 covers general information and gives a quick review of major engine components and features.

CHAPTER 2 indicates general maintenance instructions and location of engine repair parts and special tools. This chapter tells how to install the engine on the maintenance stand.

CHAPTER 3 contains maintenance tasks authorized to be performed by the Direct and General Support levels.

APPENDIX A lists references such as technical manuals and other publications to be used by personnel.

APPENDIX B contains repair parts and special tools list.

APPENDIX C lists expendable/durable supplies and materials used to maintain or repair the engine.

APPENDIX D lists the repair specifications for the cylinder head.

ALPHABETICAL INDEX lists major engine parts that would be repaired or replaced at the DS or GS level. Each entry in the index includes the task page number.

DA Form 2028-2 is used to report errors found in this manual.

USING YOUR MANUAL ON THE JOB

Like any tool, the best way to learn about this manual is to practice using it. Knowing how to use this manual will save both time and energy.

Where do you start?

Entry to a maintenance task in this manual may come from observation, troubleshooting, or the Army Oil Analysis Program (AOAP). The problem will help identify the item that needs repair or replacement.

How do you fix the problem? – A Quick Overview

1. Find the correct maintenance task in this manual. To do this, pick a key word from the item to be replaced or repaired. Look up this word in the ALPHABETICAL INDEX located at the back of this manual to locate the page number of the task.
2. Turn to the task and read it carefully before starting. Pay attention to warnings and cautions. Get the equipment, supplies, and any other personnel needed. If a task requires part replacement, refer to the Repair Parts and Special Tools List (RPSTL), Appendix B.
3. Start with step A in the task and do each step in order. In some referenced tasks, one or more steps may have been completed. If so, proceed to the next step. When the last step is done, the problem will be corrected.

Finding and Reading the Task

Example: Oil is leaking from under the engine camshaft cover. If the metal camshaft cover is not damaged, the gasket will need to be replaced. Find the task (CAMSHAFT COVER REMOVAL AND INSTALLATION) page number in the ALPHABETICAL INDEX at the back of this manual.

LIST OF TASKS

TASK	PAGE
Mounting Engine on Maintenance Stand	2-7
Engine Removal and Installation in Shipping/Storage Container	3-2
DELETED	
DELETED	
Alternator Testing and Repair	3-9.1
Starter Repair	3-10
Fuel Supply Tube and Check Valve Removal and Installation	3-11
Fuel Drain Tube and Check Valve Removal and Installation	3-14
Fuel Injectors Adjustment.....	3-17
Fuel Injectors Removal and Installation.....	3-22
Fuel Pump Removal and Installation	3-27
Air Compressor Removal and Installation	3-30
Air Compressor Repair	3-34
Air Intake Assembly Removal and Installation	3-54
Intake Manifolds Removal and Installation	3-57
Exhaust Manifolds Removal and Installation.....	3-59
Oil Pump Removal and Installation	3-63
Oil Pump Repair	3-68
Engine Oil Cooler Removal, Repair, and Installation	3-75
Oil Pan Removal and Installation	3-88
DELETED	
Left Water Header Cover and Gasket Removal and Installation.....	3-96
Right Water Header Cover and Gasket Removal and Installation	3-98
DELETED	
Coolant Pump Repair	3-103
Vibration Damper/Crankcase Front Cover and Seal Removal and Installation	3-112
Crankshaft Removal and Installation	3-117
Transmission Clutch Disk Removal and Installation	3-124
Flywheel Removal and Installation	3-126
Flywheel Ring Gear Removal and Installation	3-129
Transmission Adapter Removal and Installation.....	3-131
Liners, Pistons, Rings, and Rod Bearings Removal and Installation.....	3-137
Crankcase Rear Seal Removal and Installation	3-171
Camshaft Cover Removal and Installation	3-175
Camshaft Removal and Installation	3-178
Rocker Covers Removal and Installation	3-184
Cylinder Head Removal and Installation	3-186
Cylinder Head Repair	3-202
Valves Adjustment	3-233
Valve Train Repair	3-236

CHAPTER 1

INTRODUCTION

Section I. GENERAL INFORMATION

SCOPE

Type of Manual:

Direct Support and General Support Maintenance.

Model Number and Equipment Name:

V903C Engine.

Purpose of Equipment:

Propulsion engine for M9 Armored Combat Earthmover (ACE).

MAINTENANCE FORMS, RECORDS, AND REPORTS

Department of the Army forms and procedures used for equipment and maintenance will be those prescribed by DA Pam 738-750, The Army Maintenance Management System (TAMMS).

DESTRUCTION OF ARMY MATERIEL TO PREVENT ENEMY USE

When the tactical situation requires that Army materiel be abandoned, refer to TM 750-244-6, Procedures for Destruction of Tank-Automotive Equipment to Prevent Enemy Use, for procedures on destruction of the vehicle.

PREPARATION FOR STORAGE OR SHIPMENT

Refer to p. 3-2 for instructions on storage and shipment of the engine.

REPORTING EQUIPMENT IMPROVEMENT RECOMMENDATIONS (EIR'S)

If your engine needs improvement, let us know. Send us an EIR. You, the user, are the only one who can tell us what you don't like about your equipment. Let us know why you don't like the design. Put it on a SF 368 (Quality Deficiency Report). Mail it to:

Commander
U.S. Army Tank-automotive and Armaments Command
Attn: AMSTA-TR-E/MPA
Warren, MI 48397-5000

Section II. EQUIPMENT DESCRIPTION AND DATA

EQUIPMENT DESCRIPTION

CHARACTERISTICS

- Provides primary power for the M9 Armored Combat Earthmover.

CAPABILITIES AND FEATURES

- V-8 engine has fuel injection and liquid cooling systems.
- Four-cycle operation uses compression ignition.
- Filtered-fuel system has fuel pump and governor.
- Engine working parts are pressure lubricated.
- Centrifugal pump circulates engine coolant.


EQUIPMENT DATA

Manufacturer	Cummins Engine Co. Inc.
Model	V903C
Type	four-cycle, valve-in-head, compression ignition
Rotation	right hand (clockwise) facing vibration damper
Dimensions:	
Length	55-1/4 in. (140.3 cm)
Width	40 in. (101.6 cm)
Height	49 in. (124.5 cm)
Weight (dry)	2,450 lb (1,112 kg)
Horsepower (@ 2600 rpm)	295
Compression ratio (nominal)	15.5:1
Cylinder:	
Type	wet-type, replaceable sleeve
Number	8
Arrangement	V type
Firing order	1R, 5L, 4R, 8L, 6L, 3R, 7L, 2R
Bore	5-1/2 in. (14 cm)
Stroke	4-3/4 in. (12 cm)
Displacement	903 cubic in. (14.8 L)
Number of rings	3 (2 compression, 1 oil)

Crankshaft:
 Type counterweight
 Number of counterweights 4
 Number of main bearings 5


Starter:
 Manufacturer Prestolite
 Part Number 94134

LOCATION OF MAJOR COMPONENTS

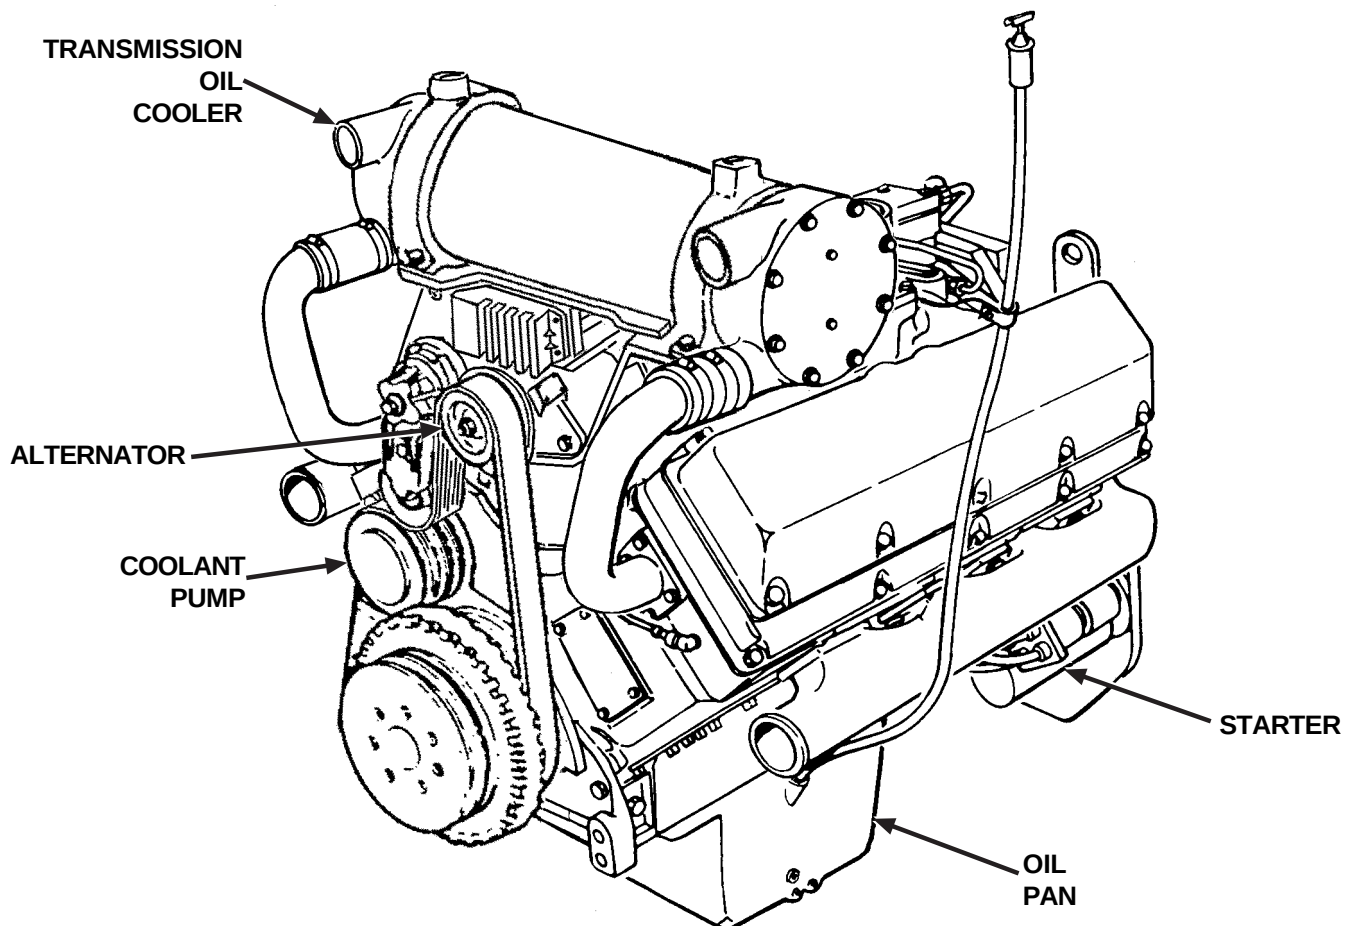

Cummins Diesel Engine, Model V903C – Left Front View

LOCATION OF MAJOR COMPONENTS – Continued

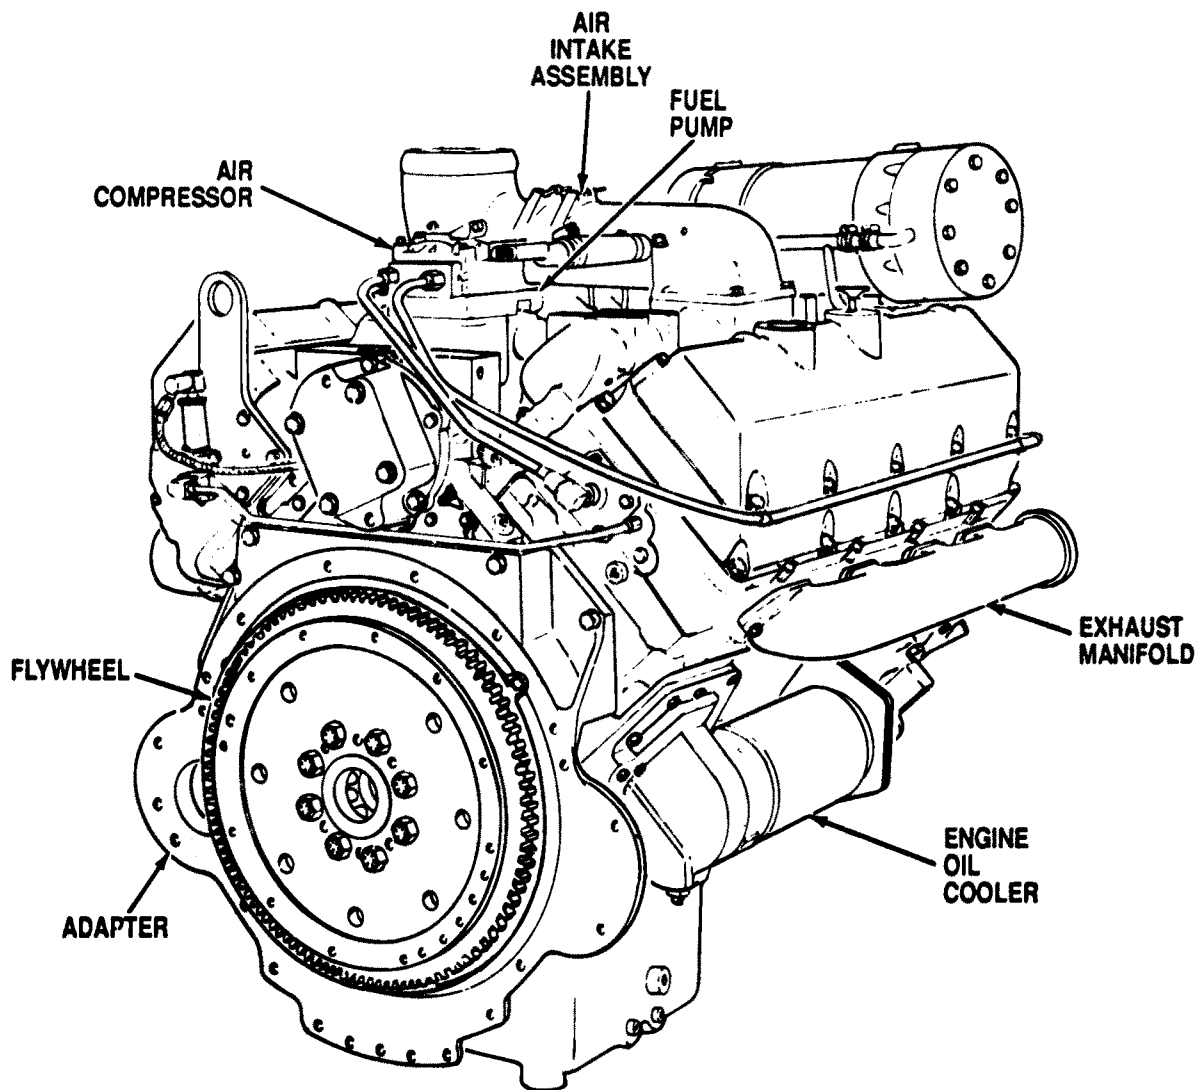

Cummins Diesel Engine, Model V903C – Right Rear View